

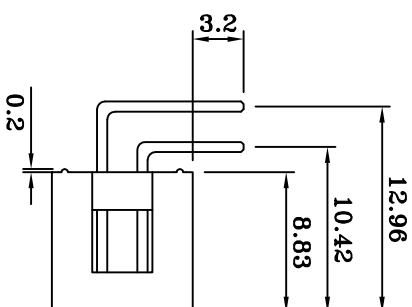
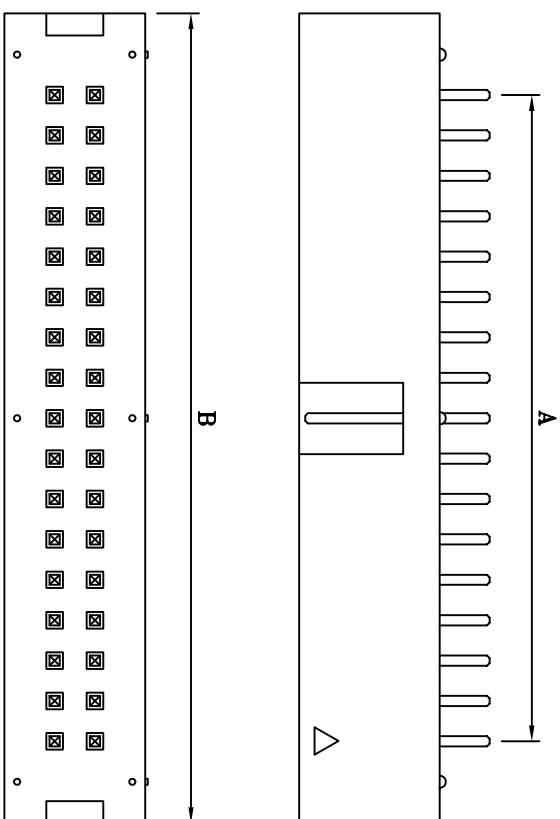
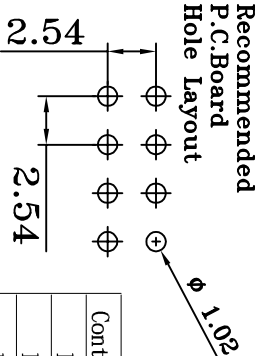


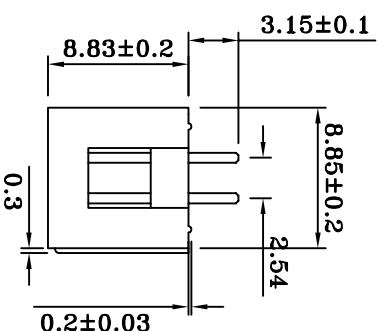

- APPLICATION AND FEATURES**
- 1.Low-profile pin headers are designed as mating devices for the IDC socket(PLA FCS-series connector)
 - 2.Assures reliable flat cable to P.C.B interconnection
 - 3.Fully shrouded
 - 4.No ejector latches is for saving space.

SPECIFICATIONS

Current Rating:3 AMP
 Insulator resistance:5000Ω min
 500V DC for 1minute
 Dielectric withstanding:AC 500V for 1minute
 Operating Temperature:-40℃~+105℃
 Contact Material:Brass or Phosphor Bronze
 Insulator Material:Polyester,UL 94V-0
 Standard:P.B.T

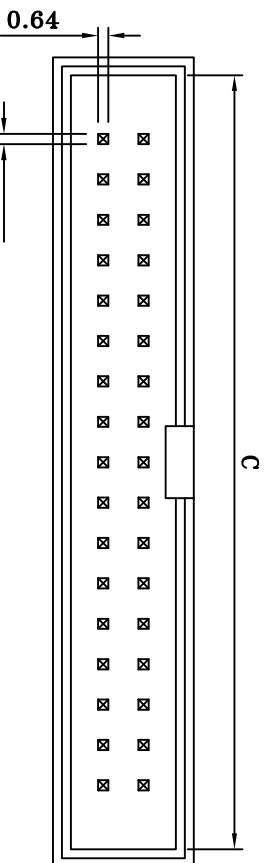

Contacts	A	B	C
10	10.16	20.31	18.10
14	15.24	25.39	22.09
16	17.78	27.94	25.64
20	22.86	33.02	30.72
24	27.94	38.22	35.92
26	30.48	40.76	38.46
30	35.56	45.84	43.54
34	40.64	50.92	48.62
40	48.26	58.54	56.24
44	53.34	63.62	61.32
50	60.96	71.24	68.94
60	73.66	84.00	81.70
64	78.74	89.04	86.74



純通有限公司
Mindwaves Co.,Ltd

COMPUTER NO.

UNIT

SCALE

PART NAME

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

MODEL

Box Header 2.54mm series

PAGE 1 OF 1

2004.9.22

180° 9200-XXP
 90° 9200-XXR

A