
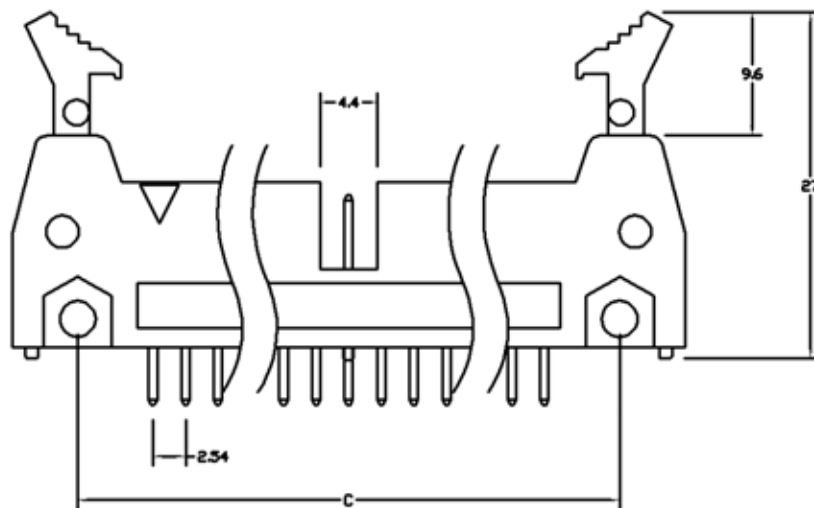
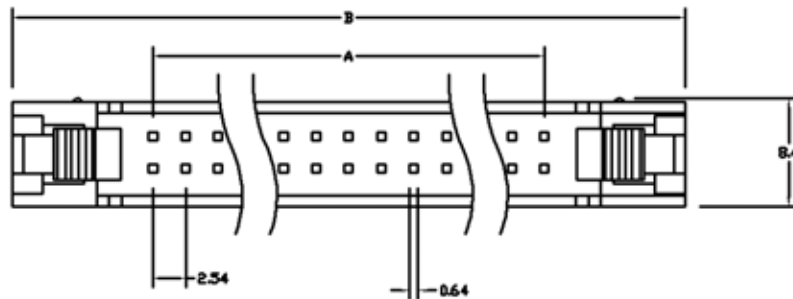


Recommended PCB Layout

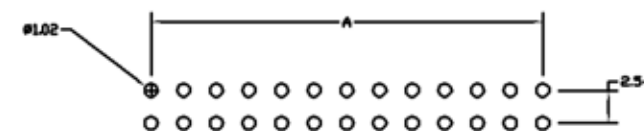

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL94V-0

Insulator Color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55° to +105°

Environmental:

Lead free, RoHS compliant



修订日期	修订内容	日期	Signature	已检查
POSITION	A	B	C	
10	10.16	32.00	21.84	
14	15.24	37.08	26.92	
16	17.78	39.62	29.46	
20	22.86	44.70	34.54	
24	27.94	49.78	39.62	
26	30.48	52.32	42.16	
30	35.56	57.40	47.24	
34	40.64	62.48	52.32	
40	48.26	70.10	59.94	
50	60.96	82.80	72.64	
60	73.66	95.50	85.34	
64	78.74	100.58	90.42	

序号/项目	数量	规格/名称, 设计, 材料, 备注等	文件编号/参考		
设计人 yulian		检查人 XXX	审核人 - 日期 XXX - 00/00/00	姓名 牛角	日期 07/05/06
純通有限公司			牛角头180度		
			Edition 0 第 1/1 页		