


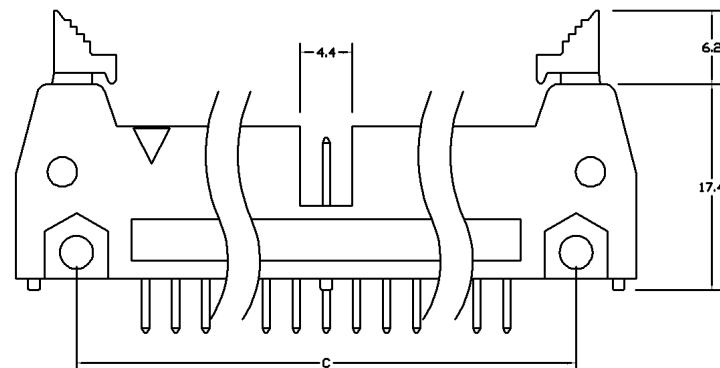


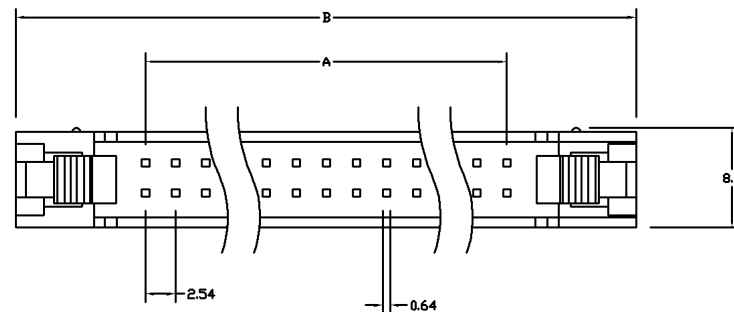

POSITION	A	B	C
10	10.16	32.00	21.84
14	15.24	37.08	26.92
16	17.78	39.62	29.46
20	22.86	44.70	34.54
24	27.94	49.78	39.62
26	30.48	52.32	42.16
30	35.56	57.40	47.24
34	40.64	62.48	52.32
40	48.26	70.10	59.94
50	60.96	82.80	72.64
60	73.66	95.50	85.34
64	78.74	100.58	90.42

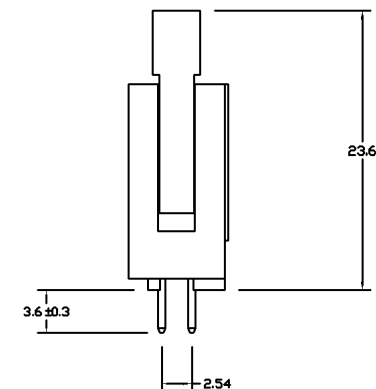

Recommended PCB Layout

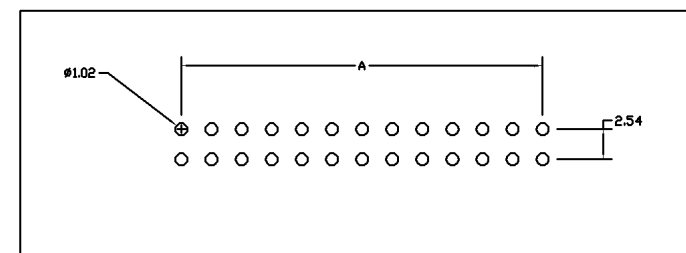

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL94V-0

Insulator Color Black

Contacts: Brass

Contact Plating: 15u"Gold Flash over Nickel underplate on contact area. Tin over copper underplate on solder tails.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperatrue Rating:

Operating temperature: -55° to +105°

參考項目	數量	標題/名稱, 設計, 材質, 標註等			文章編號/參考	
設計人	yulian	檢查人	XXX	審核人 - 日期	XXX - 00/00/00	檔名
				牛角	日期	比例
					07/05/06	X
純通有限公司				牛角 90度		
				Edition 0 圖紙 1/1		