


MATERIAL
 Insulator: PBT G.F
 Contact Pin: Brass Square Pin
 Plated: Gold plated
 Tin plated

SPECIFICATION
 Current Rate: 1AMP
 Insulator resistance: 5000mΩ min at DC 500V.
 Contact resistance: 20mΩ Max at DC 100mA.
 Operating Temperature: -55℃ ~ +105℃

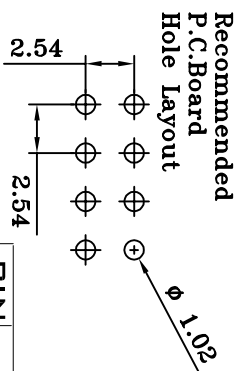

PIN	A	B	C	D	E
10	32.00	27.94	10.16	21.84	17.96
14	37.08	33.02	15.24	26.92	23.04
16	39.62	35.56	17.78	29.46	25.58
20	44.70	40.64	22.86	34.54	30.66
24	49.78	45.72	27.94	39.62	35.74
26	52.32	48.26	30.48	42.16	38.28
30	57.40	53.34	35.56	47.24	43.36
34	62.48	58.42	40.64	52.32	48.44
40	70.10	66.04	48.26	59.94	56.06
44	75.18	71.12	53.34	65.02	61.14
50	82.80	78.74	60.96	72.64	68.76
60	95.50	91.44	73.66	85.34	81.46
64	100.58	96.52	78.74	90.42	86.54

COMPUTER NO. UNIT SCALE PART NAME

mm

APPD. CKD. DWG. DATE TOLERANCE PART NO. REV.



純通有限公司

Mindwaves Co., Ltd