

NOTES:

1.MATERIAL:

HOUSING:PBT,UL94V-0

CONTACT:COPPER ALLOY,TIN PLATED

2.SPECIFICATIONS:

ELECTRICAL:

CONTACT CURRENT RATING:3AMPS

DIELECTRIC WITHSTANDING VOLTAGE:1000VAC MIN

INSULATION RESISTANCE:1000M Ω MIN

CONTACT RESISTANCE:30m Ω MAX





PHYSICAL:

SOLDER ABILITY:240 $\pm$ 5°C,95% COVERAGE

RESISTANCE TO WAVE SOLDERING HEAT:245 $\pm$ 5°C,5SEC

ENVIRONMENTAL:

OPERATING TEMPERATURE:-55°C~+85°C

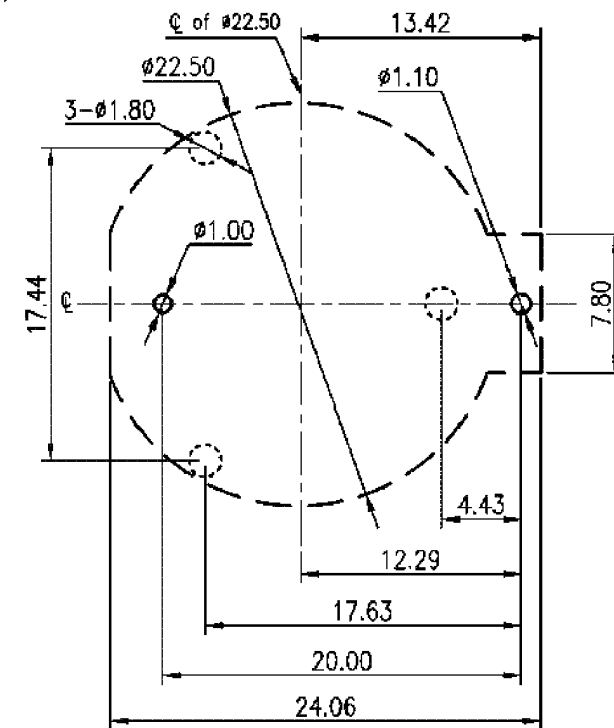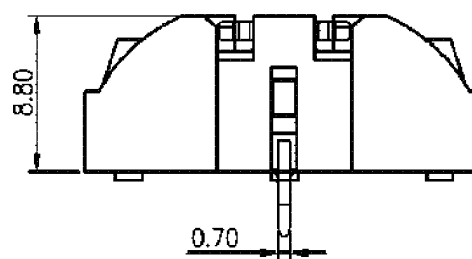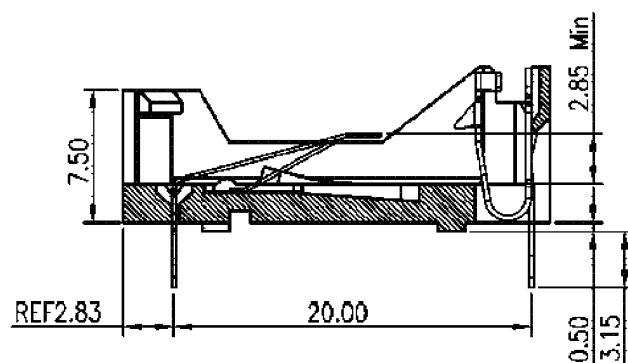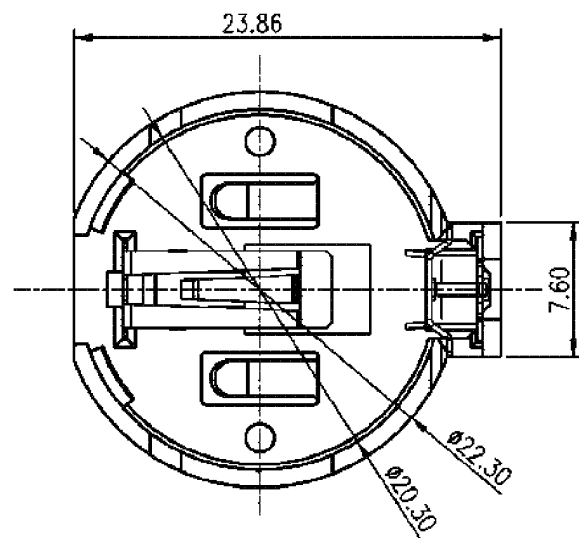

RECOMMENDED PCB LAYOUT

純通有限公司

DRAWN	BETA WANG	UNIT	mm
CHKD	WAYNE LI	SCALE	1:1
APPD	B-J LIN	DATE	2006.10.02

TOLERANCES:
0 PLC $\pm$ 0.35
1 PLC $\pm$ 0.30
2 PLC $\pm$ 0.20
3 PLC $\pm$ 0.13
ANGLES $\pm$ 3°



NAME:
BATTERY HOLDER 2P
for CR2032 3rd-ED

DRAWING NO.

REVISION

0