
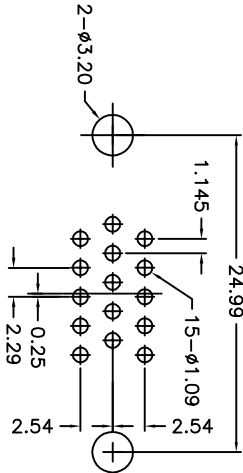


REV.	NOTES	DATE
A	RELEASED	2005/09/16
B	增加料號:A03-8141-6982	2005/09/26

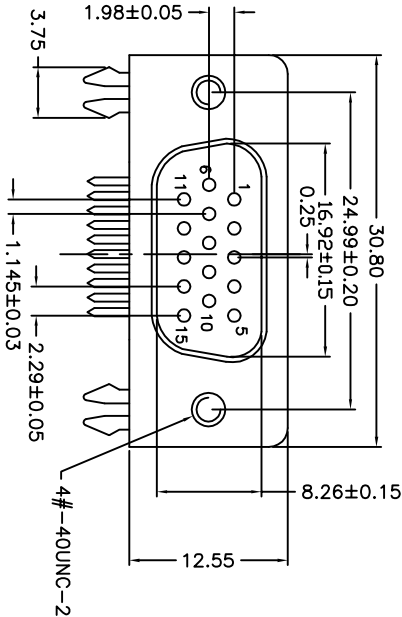

P.C.B. LAYOUT




NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold
- 1.4 Shell:Steel Gold Plated
- 1.5 Screw: Brass ,Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55C to+105C

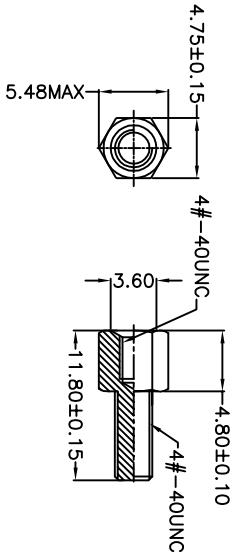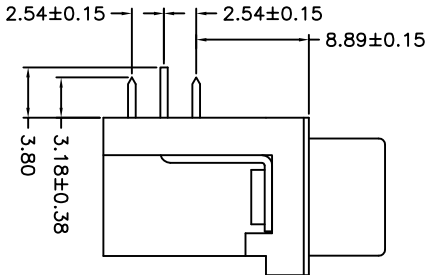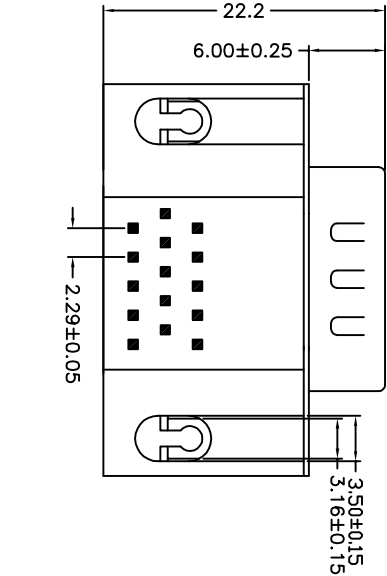

單位(UNITS)	mm	純通有限公司			
數量(QTY)	N/A				
材料(MTL)	SEE NOTE				
處理(FINISH)	SEE NOTE				
DIMENSIONS TOLERANCE		圖名(NAME)			
METRIC		HDR 15公8.89鉚附全金黑 3.18			
.0= ±.5		料號(PART NUMBER)	4100-15PG		
.00= ±.30		圖號(DRAW NUMBER)	RA038141X98		
.000= ±.XXX		圖檔(FILE NAME .DWG)	E:GCT/A/03		
.0000= ±.2		比例(SCALE)	1/1	圖紙(SIZE)	A4
ANG. = ± 2°		頁次(SHEET)	1	版本(REV.)	B

