
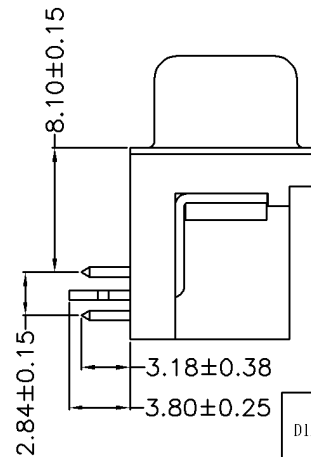
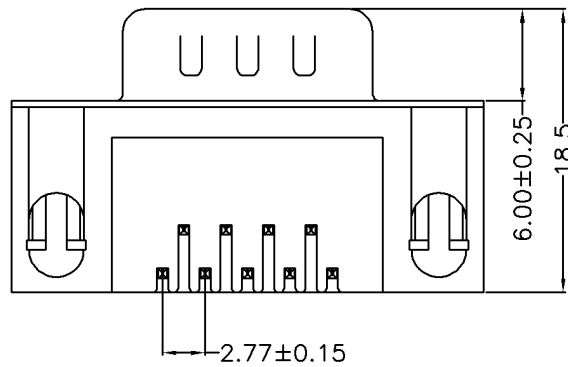
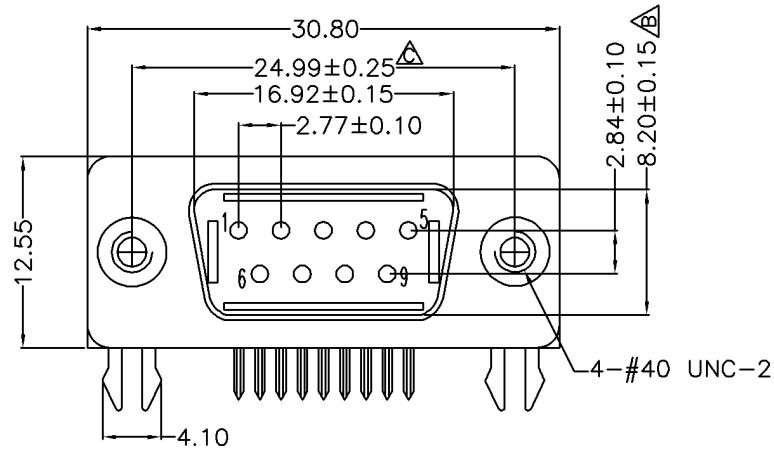


P.C.B. LAYOUT

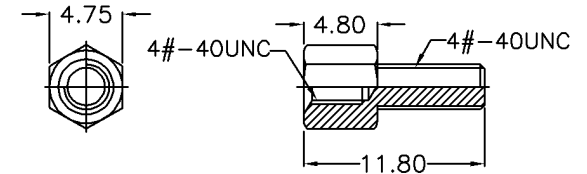

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold/TIN PLATED
- 1.4 Shell:Steel,Nickel Plated
- 1.5 Screw:Brass, Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55℃ to+105℃

單位(UNITS)	mm	純通有限公司					
數量(QTY)	N/A						
材料(MTL)	SEE NOTE						
處理(FINISH)	SEE NOTE						
繪圖(DRAW)		圖名(NAME)					
設計(DE'N)		DR9公鉚附全金黑 8.1 RoHS					
審校(CH'K)		料號(PART NUMBER)					
核准(APP'D)		圖號(DRAW NUMBER)		RA020914XX80			
		圖檔(FILE NAME .DWG)		E:GCT/A/02/091/8			
		比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1
				版次(REV.)	C		

DIMENSIONS TOLERANCE

METRIC

.0= ±.5
.00= ±.30
.000= ±.XXX
.0000=±.
ANG.= ± 2°

