
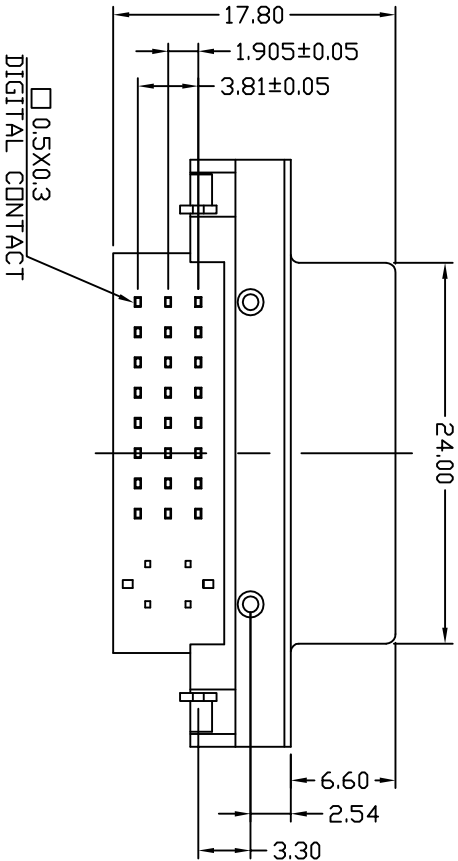
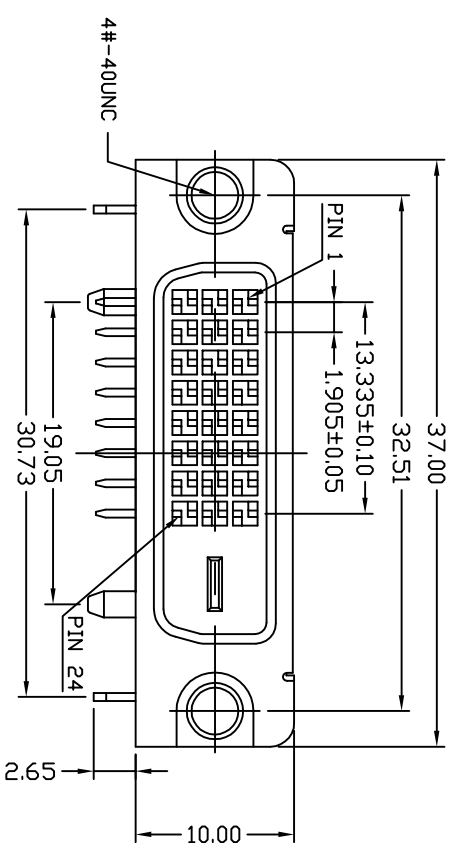


NOTES:
1.MATERIALS:
INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC
LCP UL94V-0.
CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT,
TIN PLATED ON TAIL 100u", OVER NICKEL PLATED 50u".
SHELL: STEEL, NICKEL PLATED.
BOARDLOCK: BRASS, TIN PLATED.
RIVET: BRASS, NICKEL PLATED.
2.ELECTRICAL:
INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM
CURRENT RATING: 3.0 AMPS PER CIRCUIT
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
3.MECHANICAL PERFORMANCE:
MATING FORCES: 4.5kgf MAXIMUM
UNMATING FORCES: 1kgf MINIMUM, 4kgf MAXIMUM
DURABILITY: 100 CYCLES MINIMUM
4.ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TD +85°C

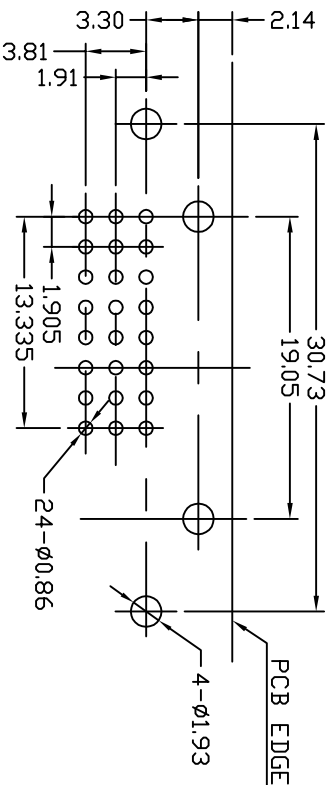

PCB LAYOUT (BOTTOM VIEW)TOLARANCE:±0.05

REV.	NOTES	DATE
A	RELEASED	2004/07/05
B	7.70 改為 7.90 , 2.34±0.15 改為 2.60±0.15	2004/07/10

單位(UNITS)	mm	純通有限公司			
數量(QTY)	N/A				
材料(MTL)	SEE NOTE	圖名(NAME)			
處理(FINISH)	SEE NOTE				
繪圖(DRAW)		DVI 24PIN 母半金貝吉色無後鐵殼(BC)			
設計(DE'N)					
審核(CH'K)		料號(PART NUMBER)	4200-24F		
核准(APP'D)		圖檔(DRAW NUMBER)			
		圖檔(FILE NAME .DWG)	E:GCT/A/VI		
		比例(SCALE)	圖紙(SIZE)	頁次(SHEET)	版本(REV.)
		1/1	A4	1	B

DIMENSIONS TOLERANCE

METRIC

.0= ± .38
.00= ± .25
.000= ± .XX
ANG.= ± 2°