
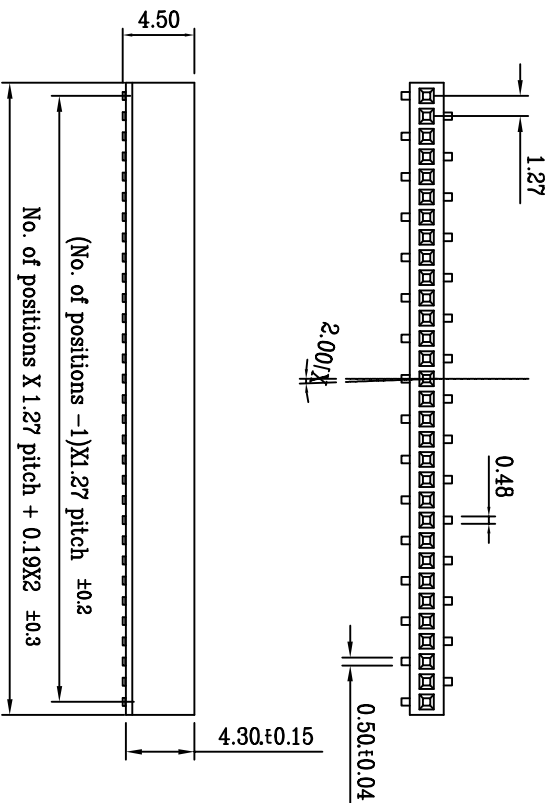


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°~+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

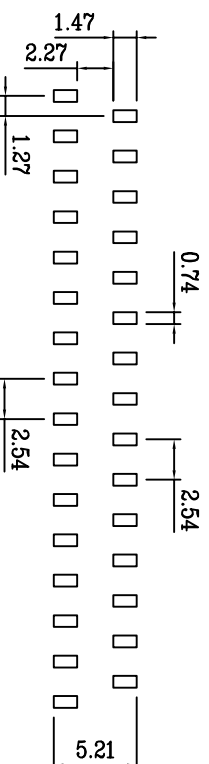

PCB layout

1.27mm SMD Socket
(Straight/Base:4.3mm)



純通有限公司
Mindwaves Co., Ltd

MODEL

PAGE 1 OF 1

COMPUTER NO.			UNIT	SCALE	PART NAME	
APPD.	CKD.	DWG.	mm		Female Pin Header 1.27mm Single row SMD	
			DATE	TOLERANCE	PART NO.	REV.

Y.J.Lin

3311-1*_S

A