
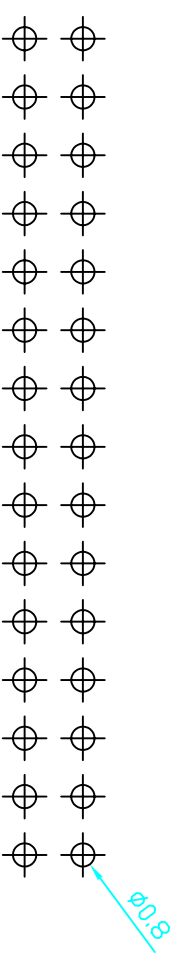
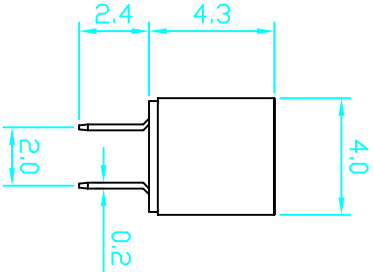
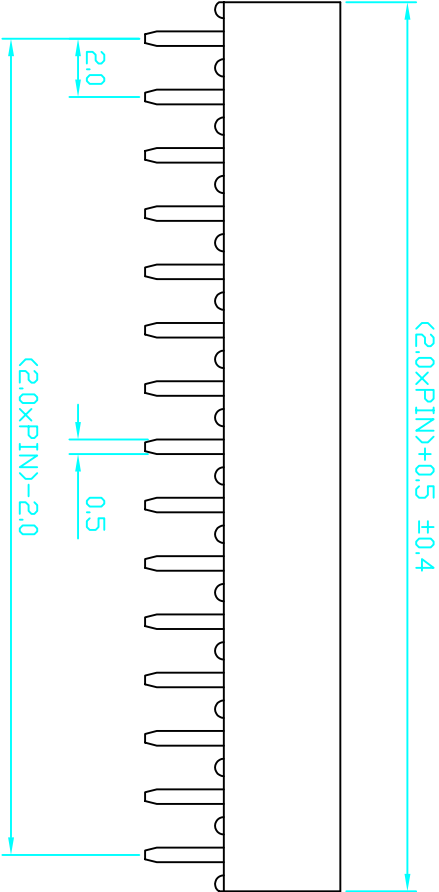


- MATERIAL
- 1. CONTACT: Phosphor Bronze
 - 2. INSULATOR: Nylon-6T (UL-94V)
 - 3. CONTACT PLATING: GOLD OVER NICKEL

SPECIFICATION

- 1. CONTACT RESISTANCE: 20m ohms Max
- 2. INSULATOR RESISTANCE: 5000M ohms Min
- 3. CURRENT RATING: 2 Amp
- 4. DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
- 5. OPERATING TEMPERATURE: -55°C TD +105°C

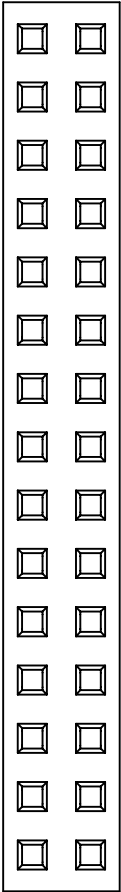

P.C.B. LAYOUT

純通有限公司										A	
TITLE		FEMALE HEADER P=2.0mm 雙排				SCALE		APP.		GENERAL TOLERANCE UNLESS SPECIFIED	
DWG.NO.						SHEET		CHK.		LINEAR	
UNIT		MM				1 OF 1		DR.		0.00±0.30	
								DAVID		0.00±0.20	
										±1°	
										REV	
										A	

純通有限公司

REV