
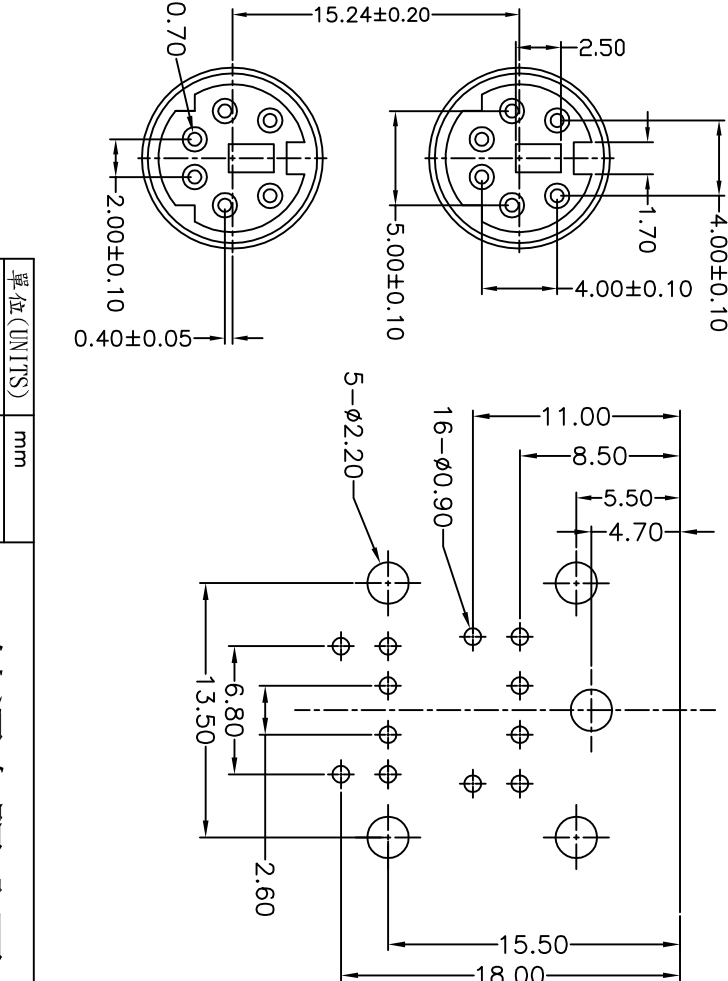


REV.	NOTES	DATE
A	RELEASED	2005/09/16
B	12.60→12.50	2005/12/27

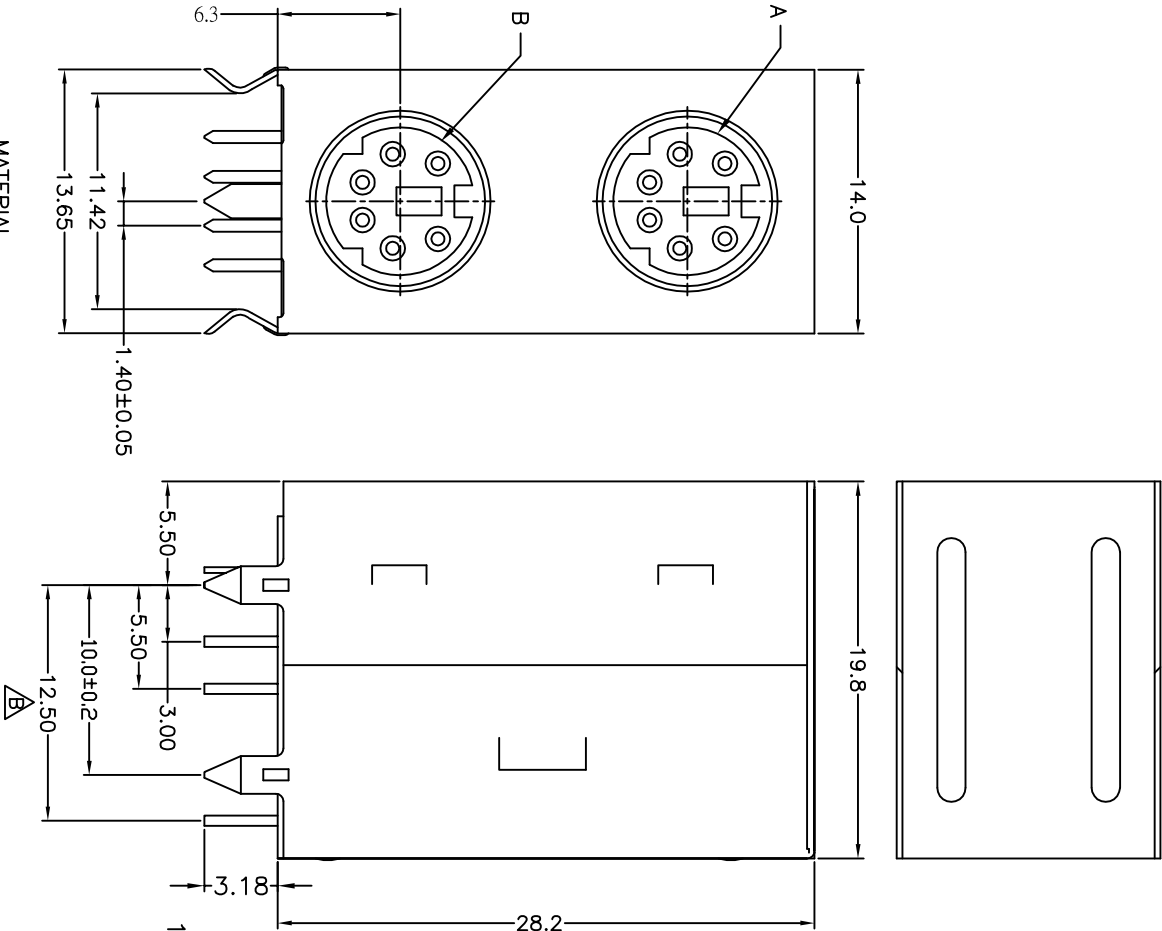

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	
設計(DE'N)	
審校(CHE'K)	
核准(APP'D)	
圖名(NAME)	純通有限公司
料號(PART NUMBER)	1000-2*6SD-GP
圖號(DRAW NUMBER)	RAMD6102
圖檔(FILE NAME .DWG)	E:GCT/A/MD/2
比例(SCALE)	1/1
圖紙(SIZE)	A4
頁次(SHEET)	1
版本(REV.)	B

MATERIAL
INSULATOR: PBT UL94V-0
CONTACT: Phosphor Bronze, Gold/Tin plated
SHELL: Brass(0.3T), TIN PLATED
ENVIRONMENTAL
OPERATING TEMPERATURE: -55~+105°
ELECTRICAL
CONTACT CURRENT RATING: 1 Amp
DIELECTRIC WITHSTANDING : AC 1000V min. Per minute
INSULATION RESISTANCE: 500MΩ min.at 500V DC
CONTACT RESISTANCE: 30mΩ Max

DIMENSIONS TOLERANCE
METRIC
.0 = ±.3
.00 = ±.2
.000 = ±.XXX
ANG. = ±2°