

Product Specification

Material

Insulator: Glass-Filled Thermoplastic PBT or PPS UL94V-0 rates

Contact: Phosphor Bronze, plated full gold or selected gold in mating area, 100u" min. tin-lead on termination area, with entire contact under-plated 50u" min. Nickel

Electrical





Contact Resistance: 30 milliohms
Max at 1 AMP DC.

Insulation Resistance: 1000
megohms at 500 VDC

Dielectric Withstanding Voltage :
500 VAC/rms 60Hz for 1 minute

Current Rating : 1 AMP


Volatge Rating: 250 VAC/rms
60HZ

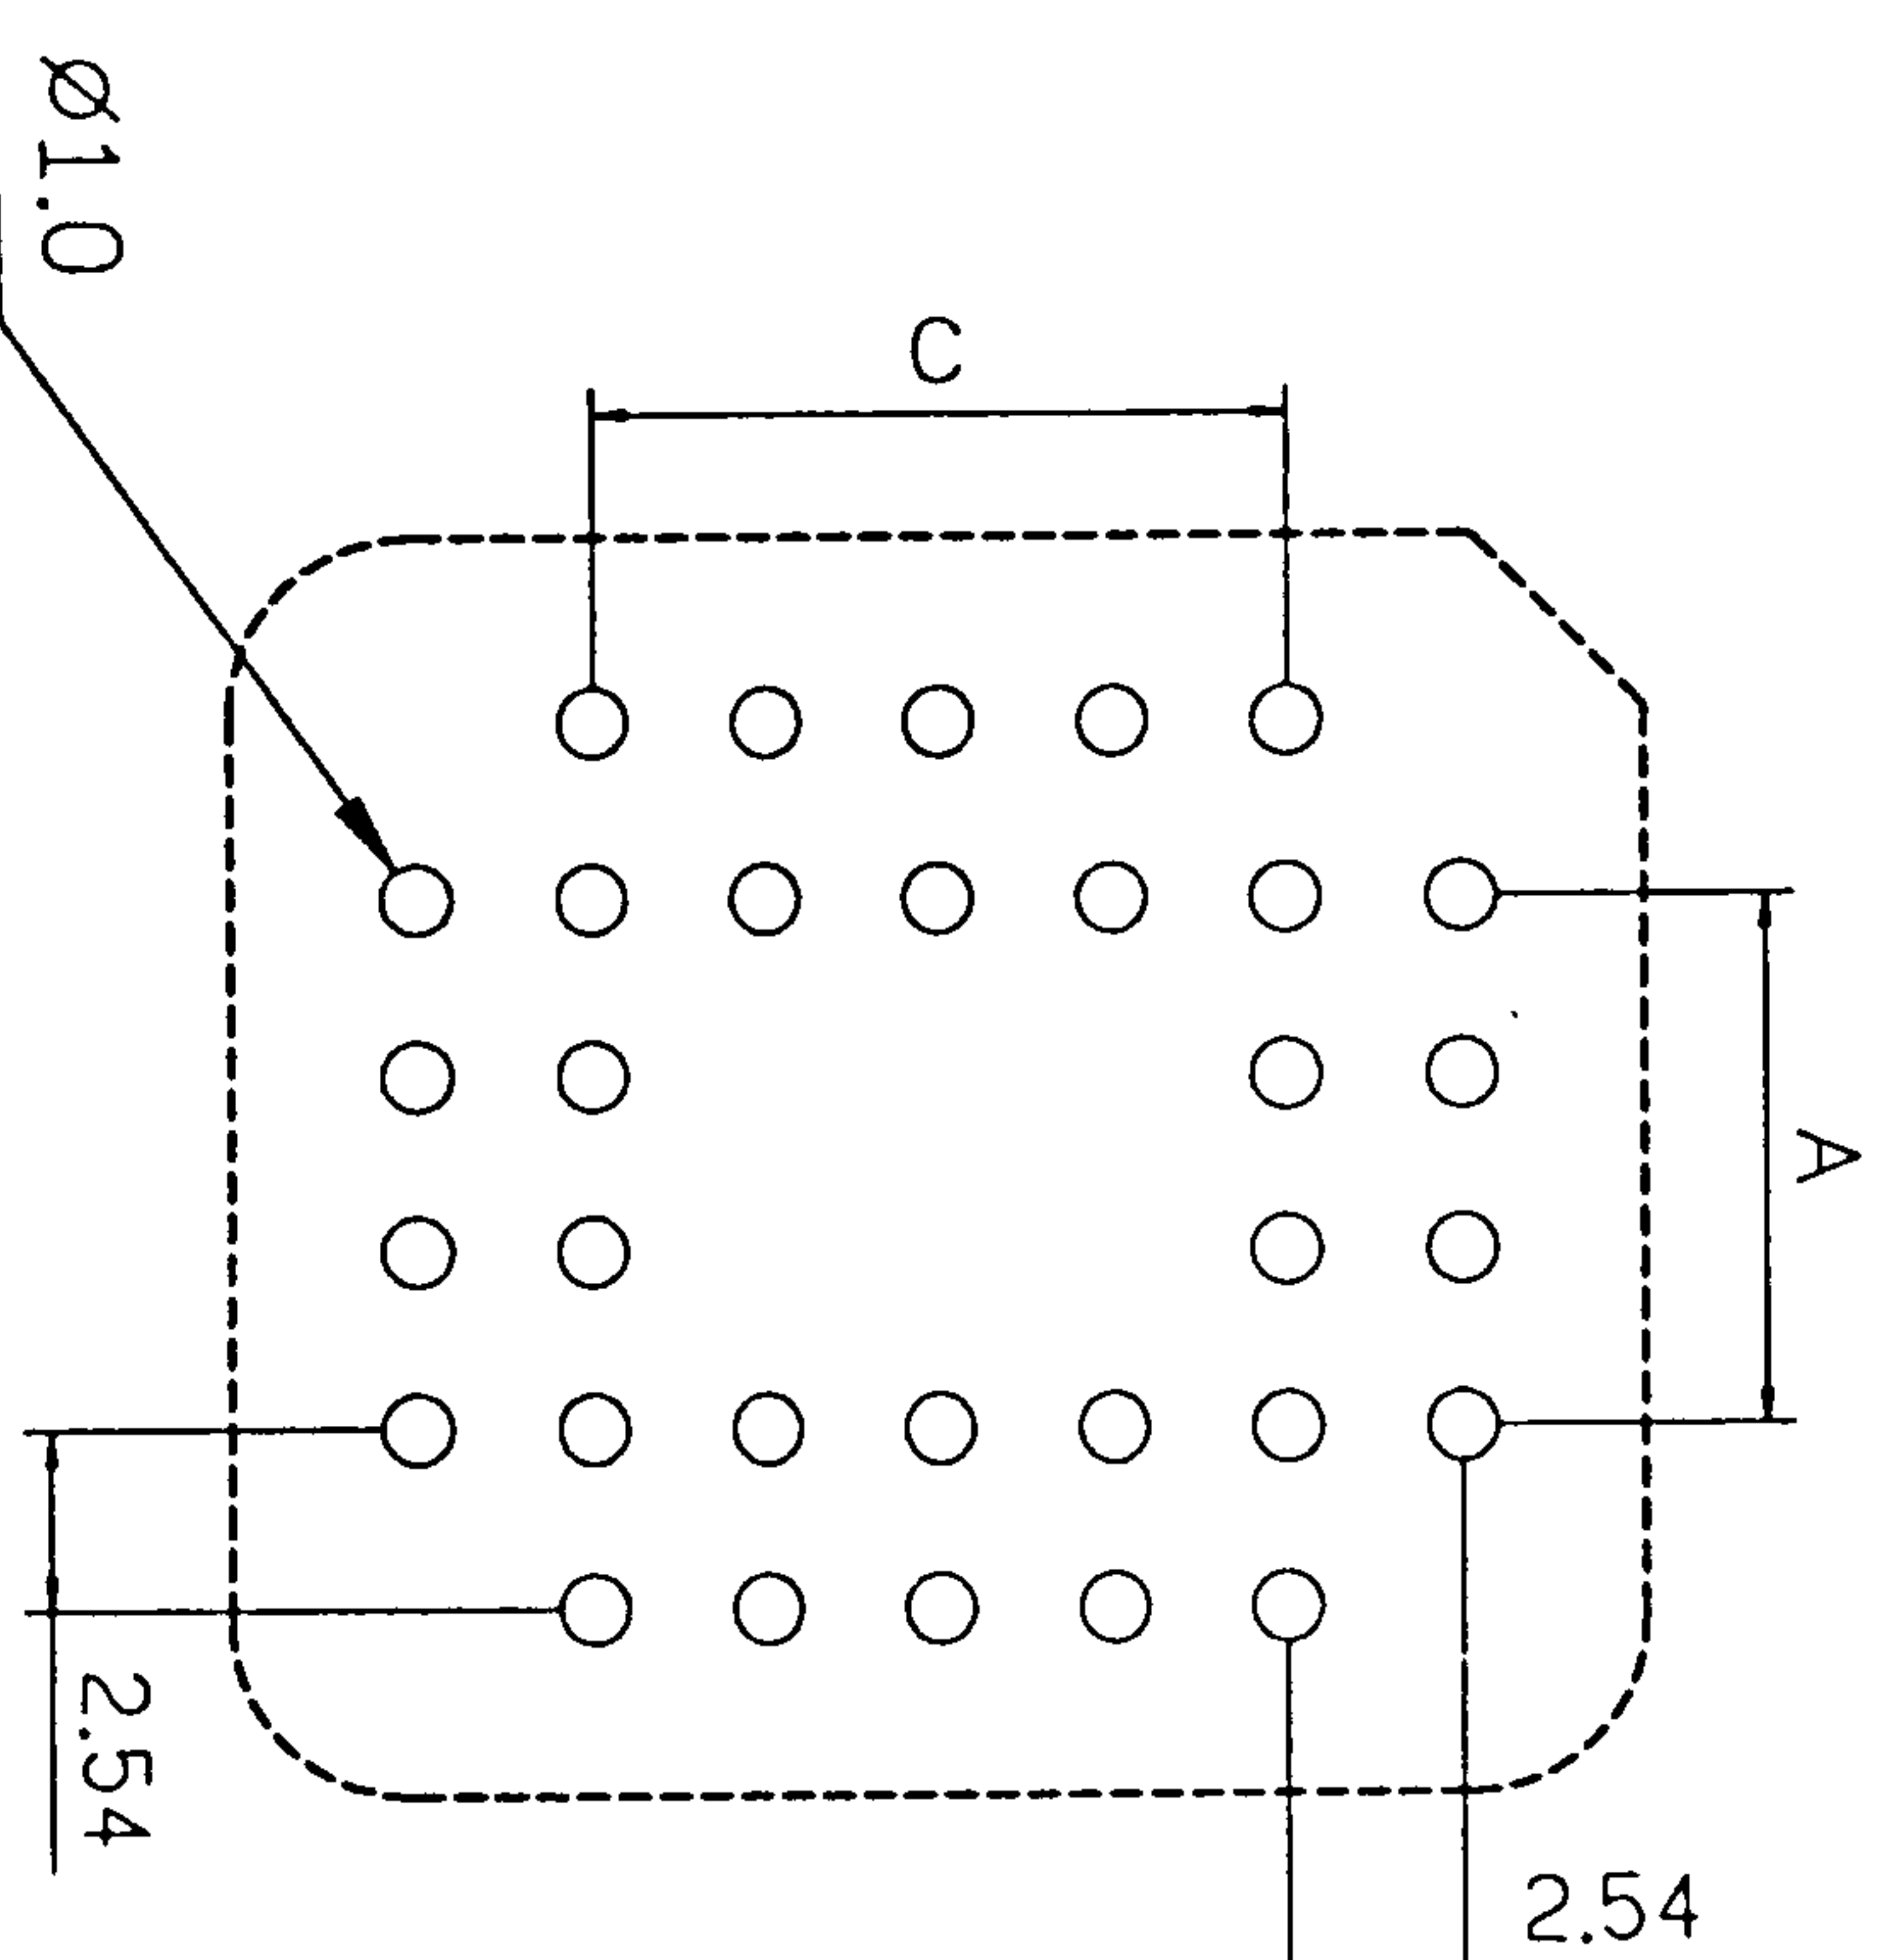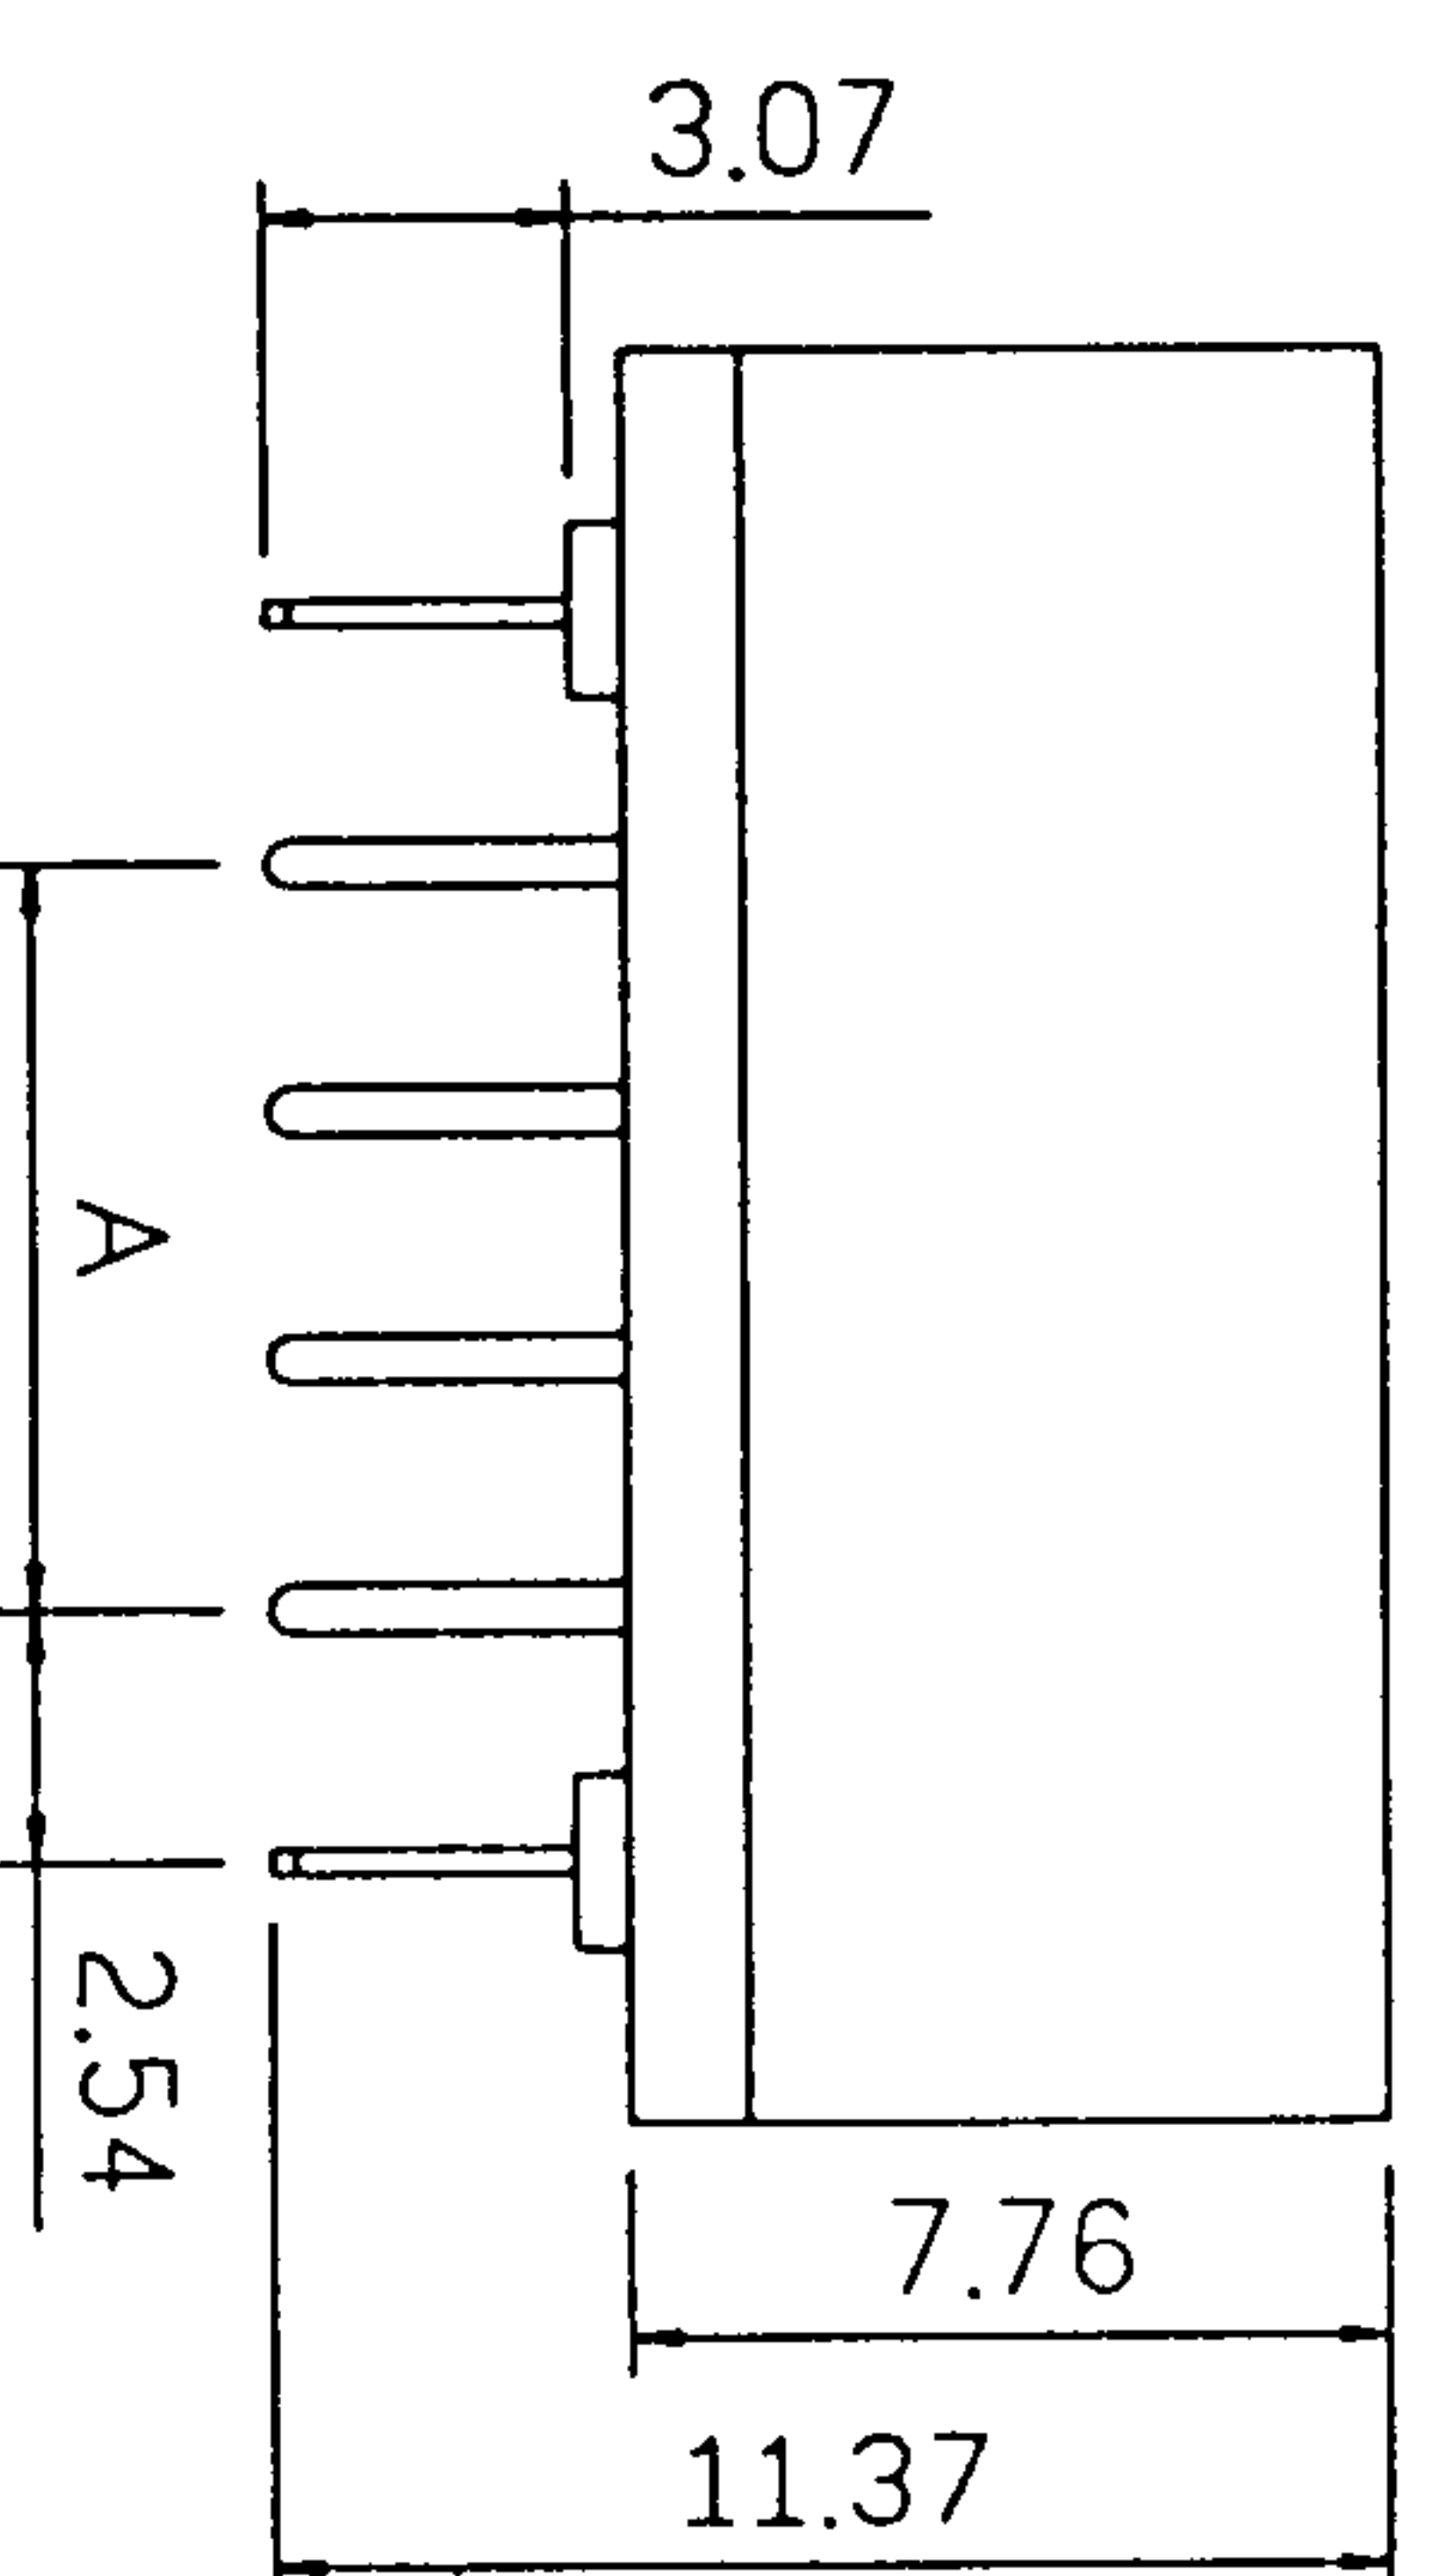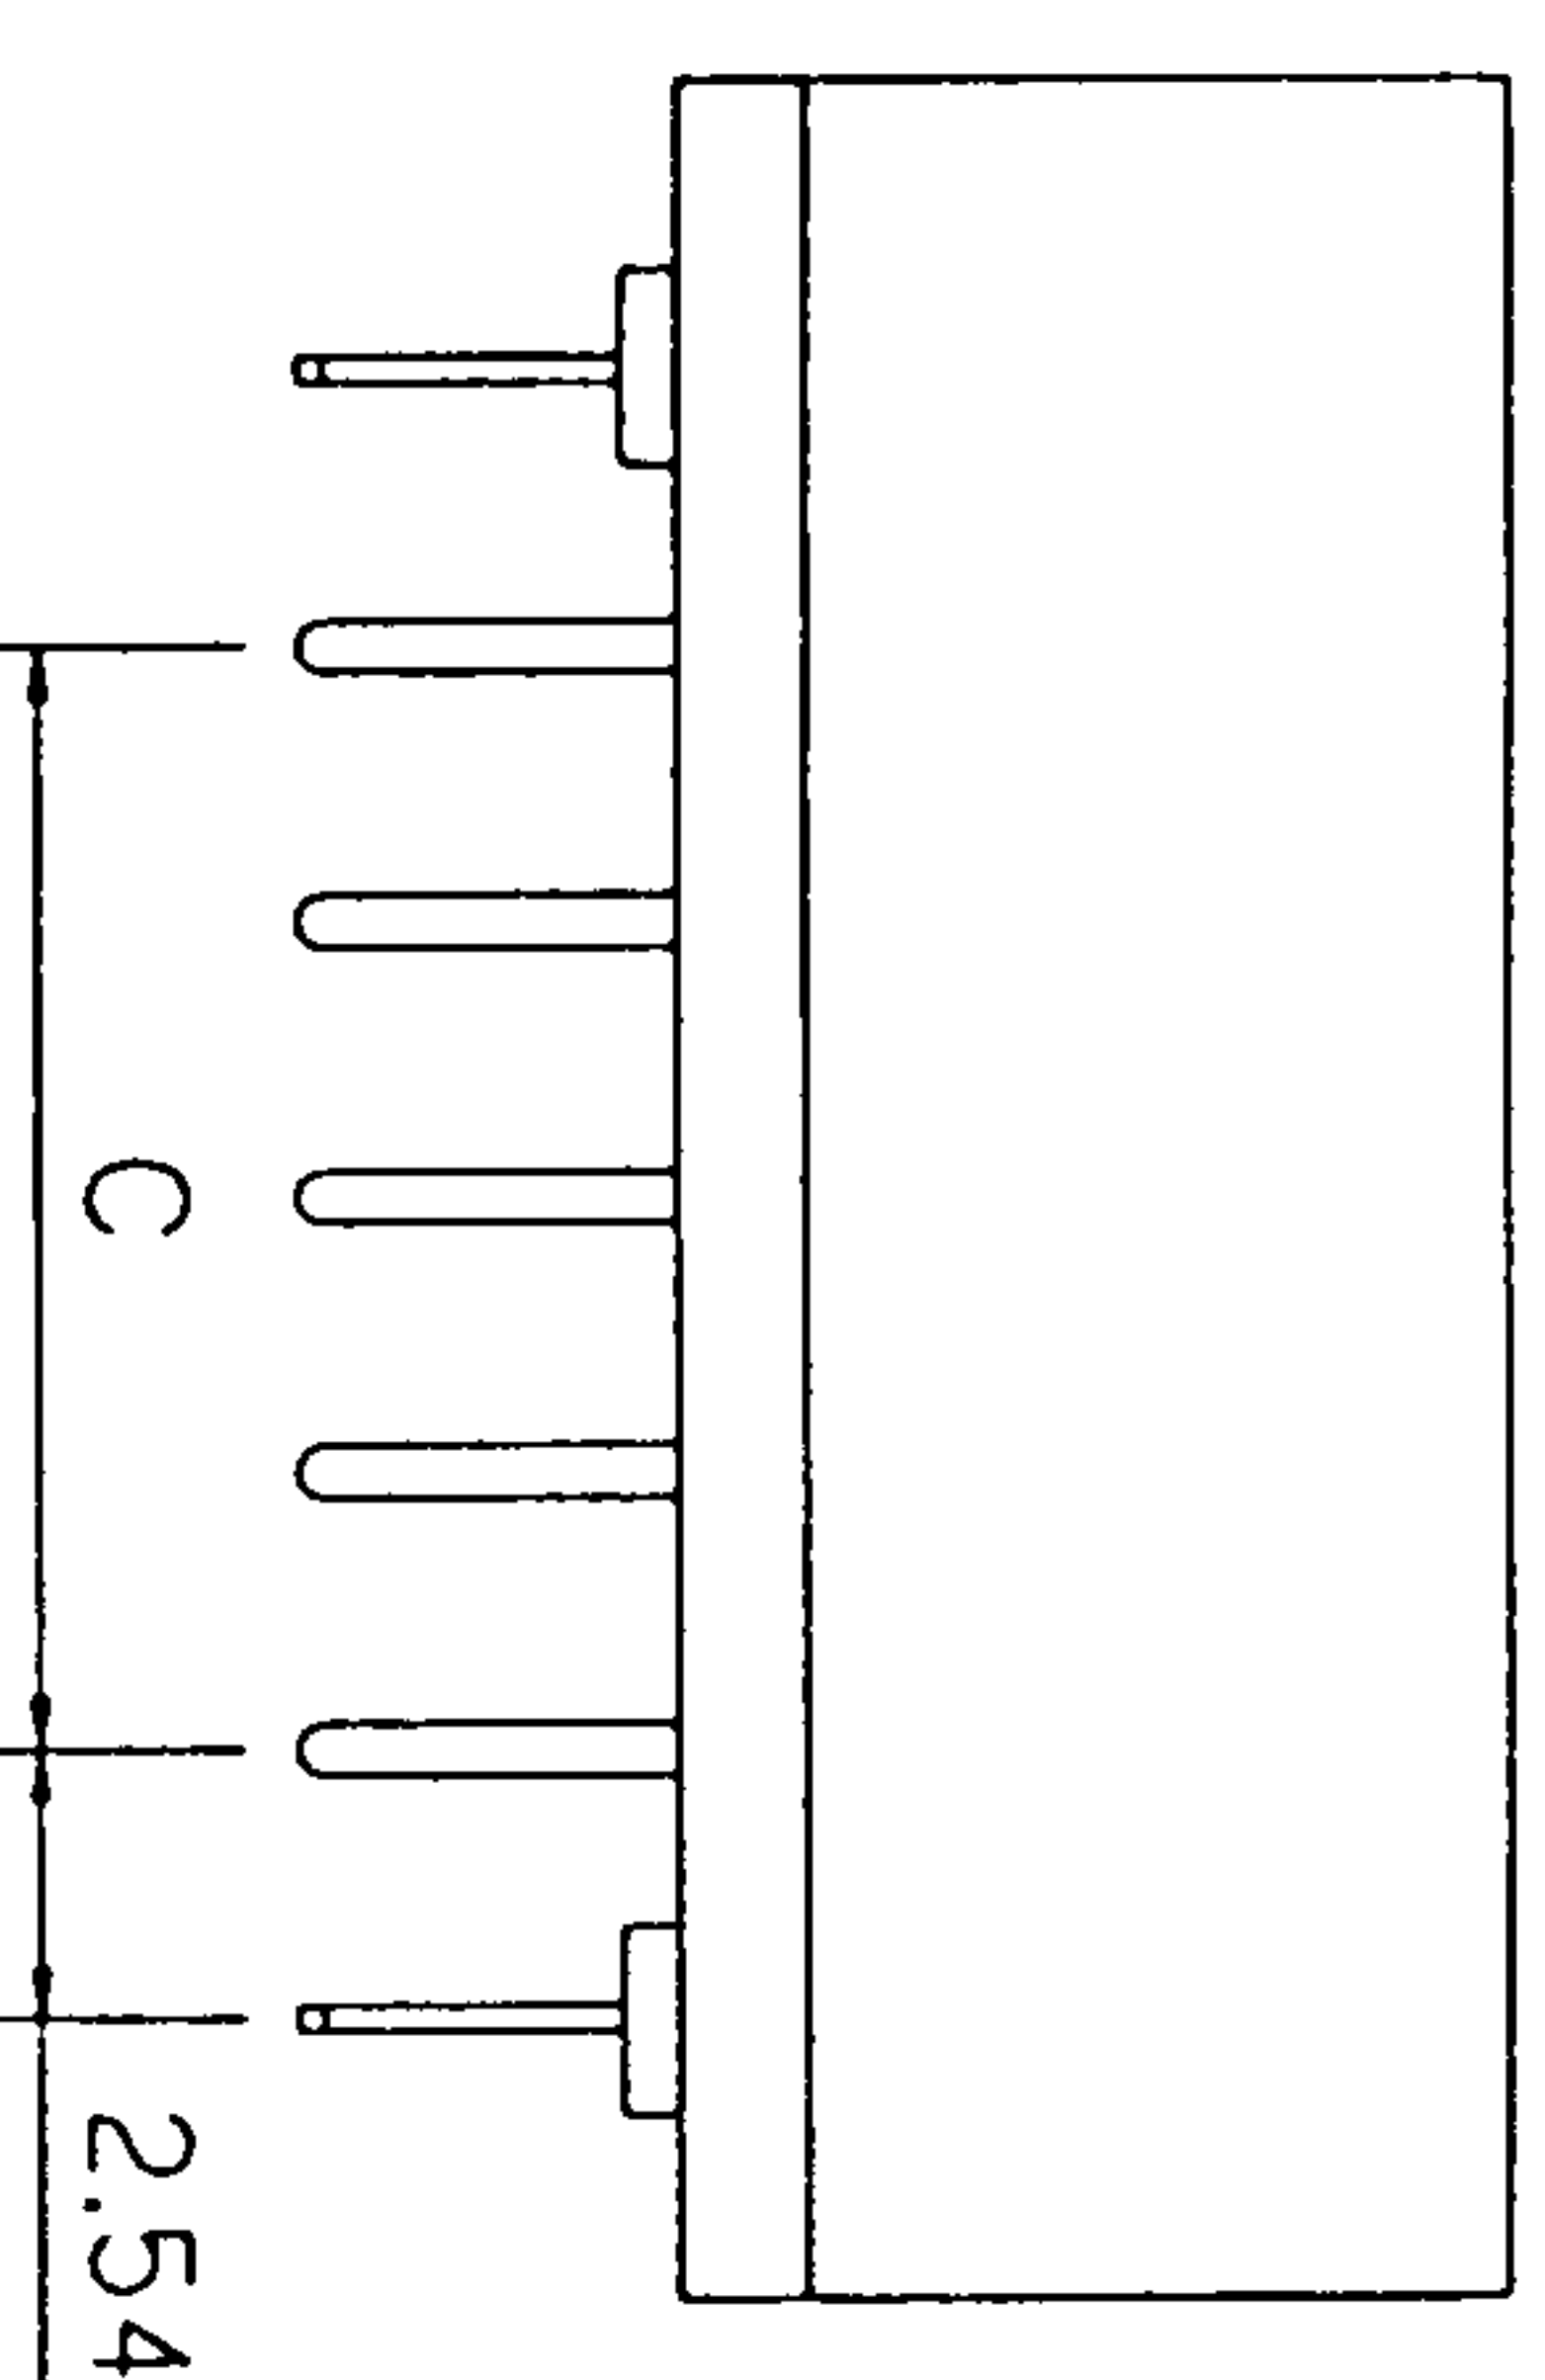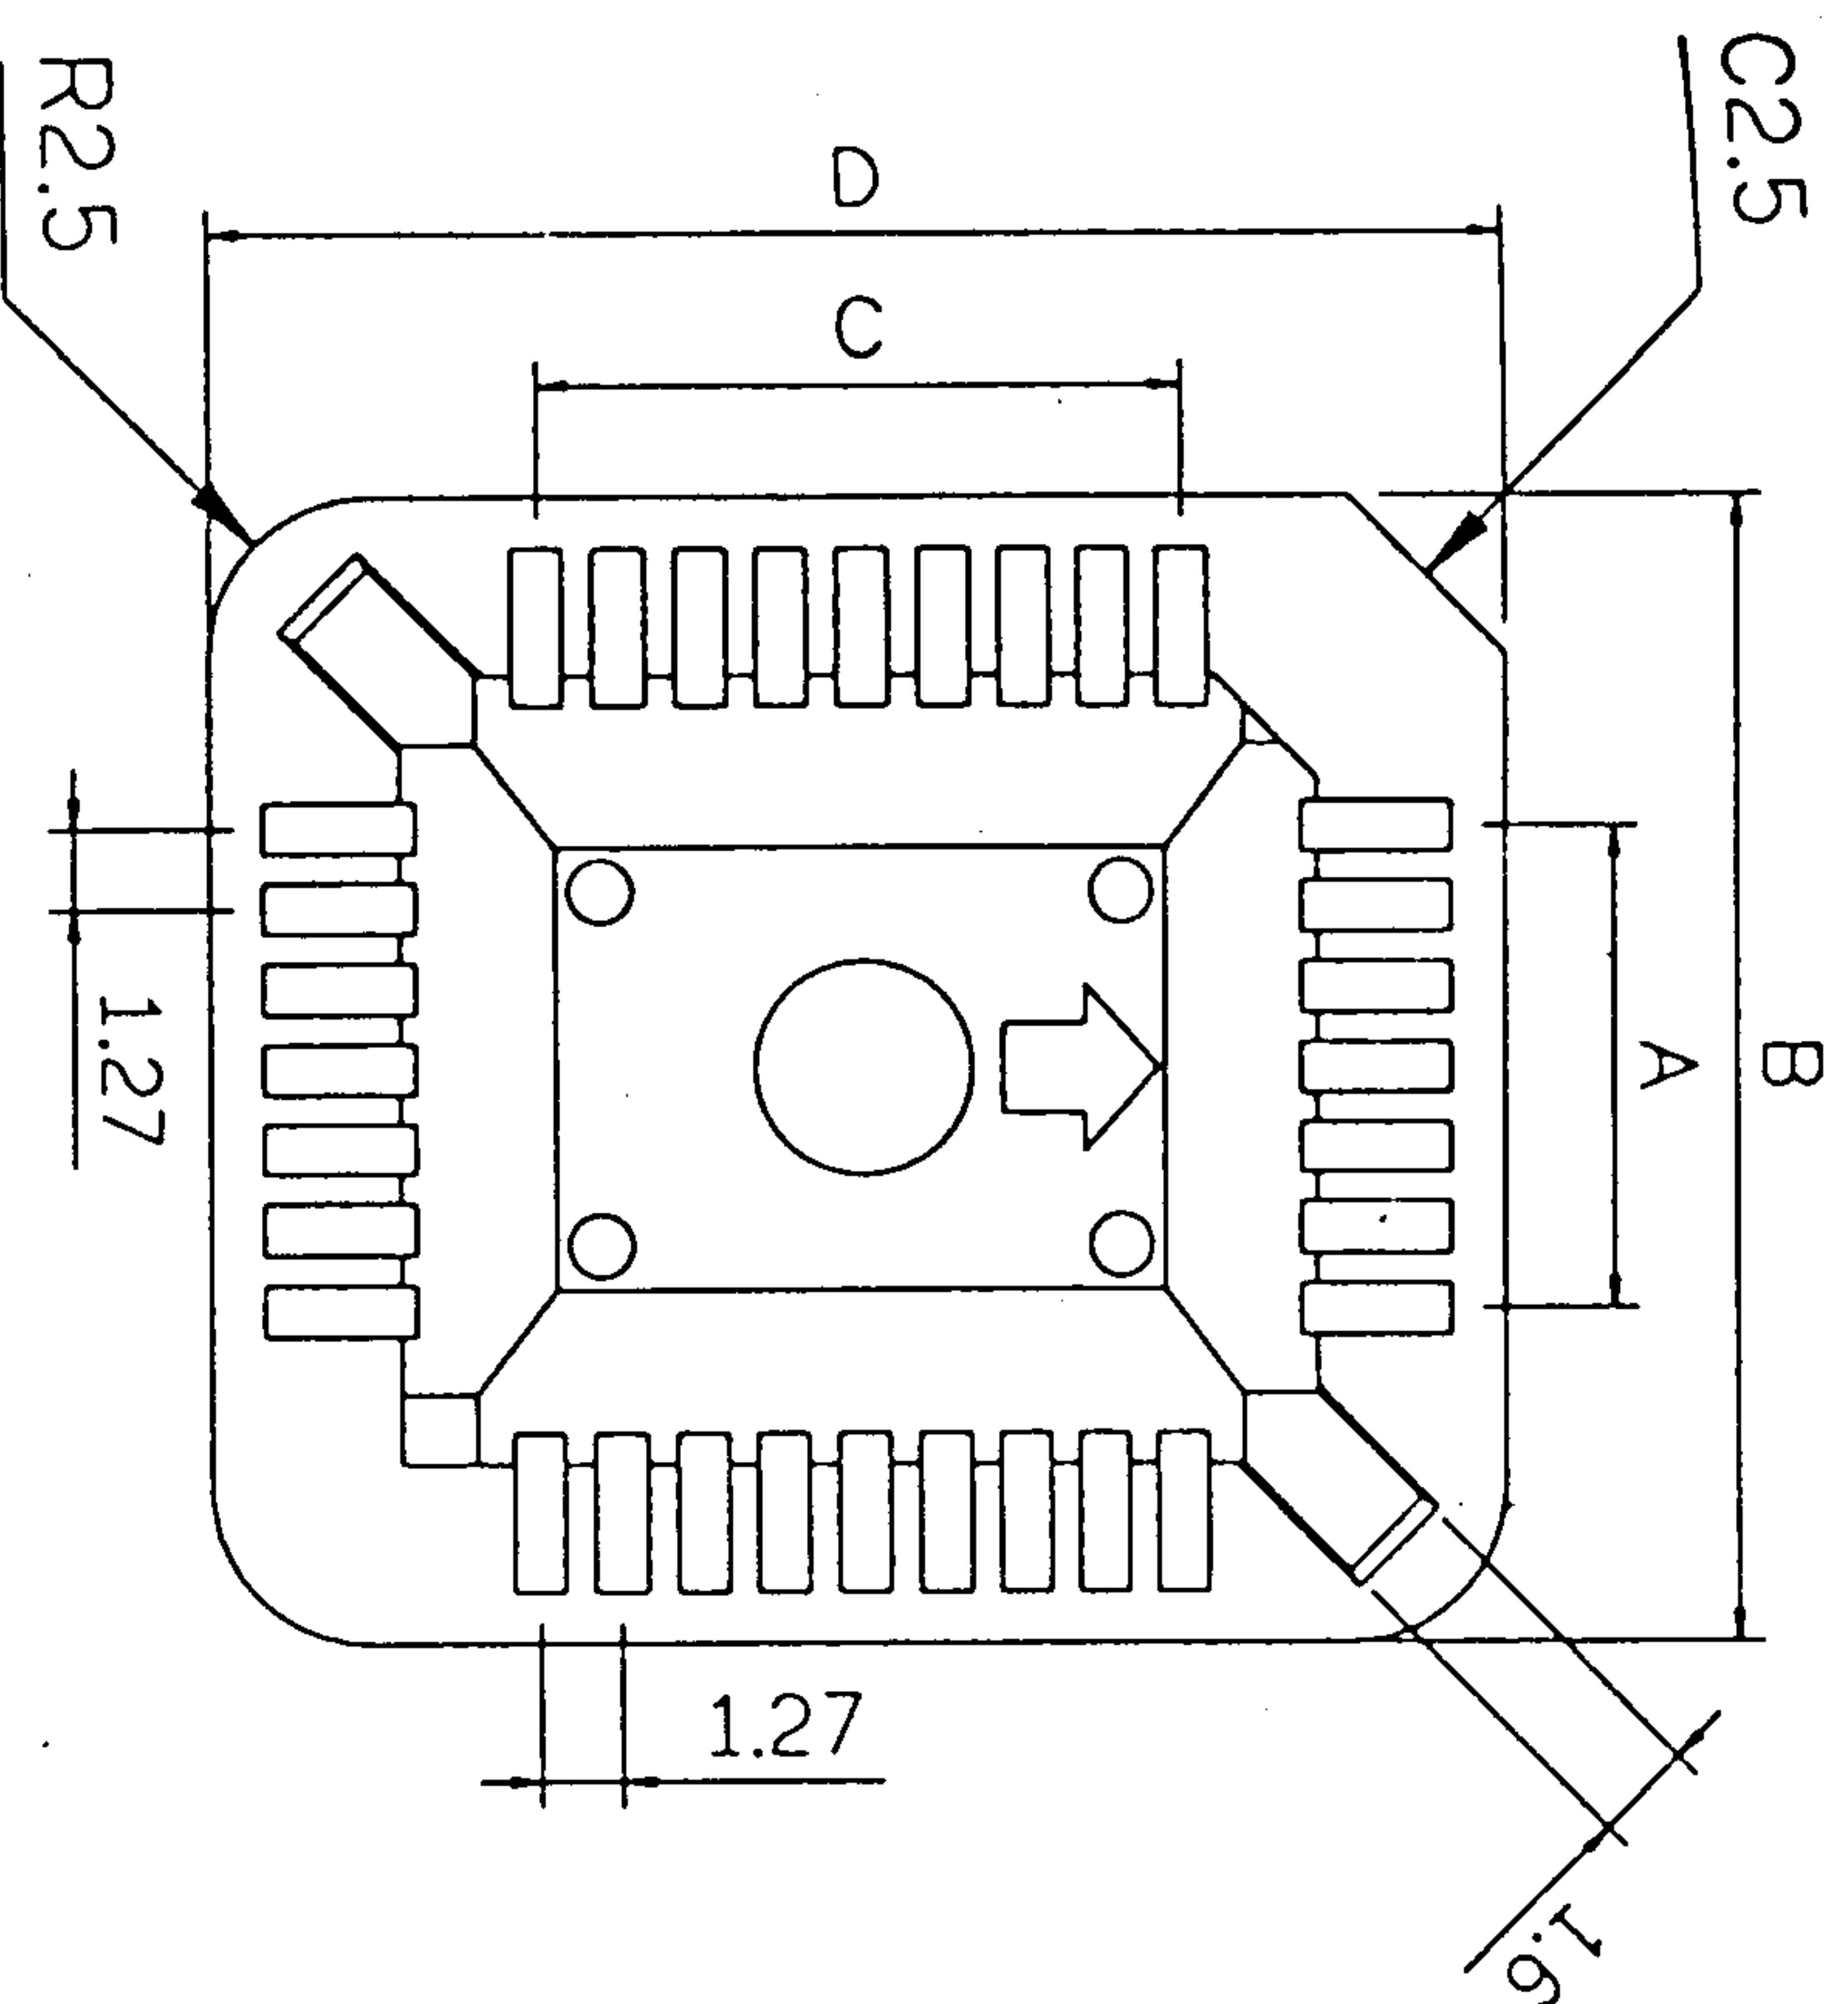

Dimensions

Positions	A	B	C	D
20	5.08	15.50	5.08	15.50
28	7.62	18.04	7.62	18.04
32	7.62	18.04	10.16	20.50
44	12.70	23.48	12.70	23.48
52	15.24	25.88	15.24	25.88
68	20.32	31.04	20.32	31.04
84	25.40	36.04	25.40	36.04

Recommended PCB Layout

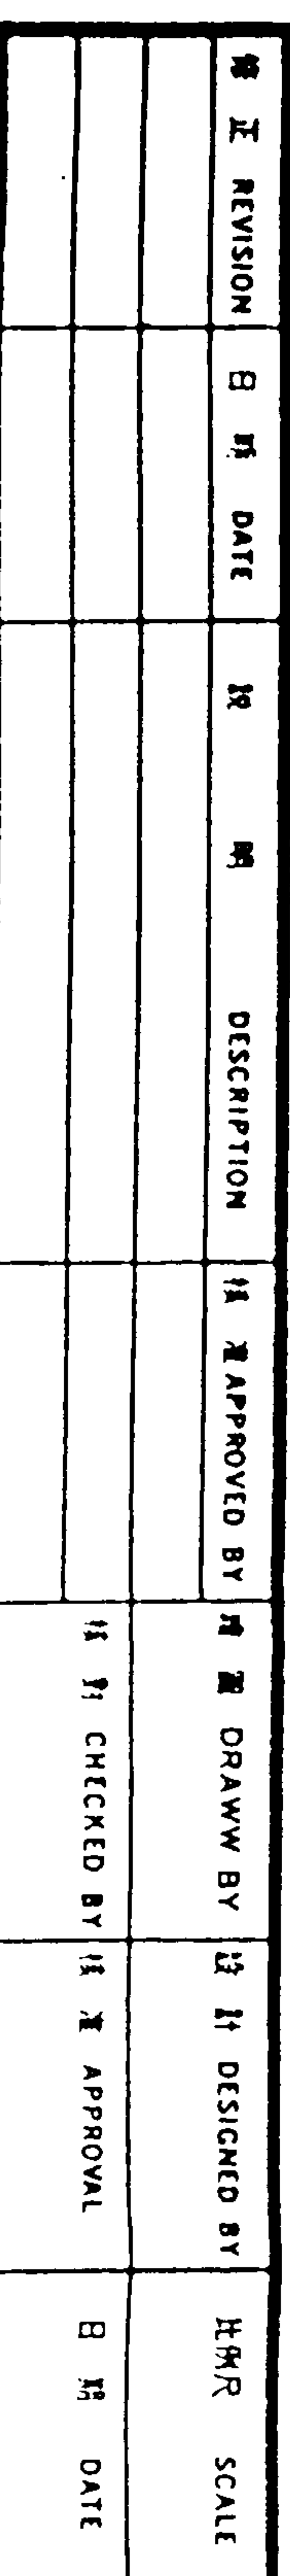

P.L.C.C. Socket

圖 號	圖 號	實 際 號
DRAWING NO	SHEET NO	JOB NO