



MATERIALS

1. CONTACT: BRASS
2. INSULATOR: PBT (UL 94V-0)
3. CONTACT PLATING: GOLD OVER NICKEL

SPECIFICATION

1. INSULATOR RESISTANCE: 5000M ohms Min
2. CURRENT RATING: 3 Amps
3. DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
4. OPERATING TEMPERATURE: -45°C TO +105°C

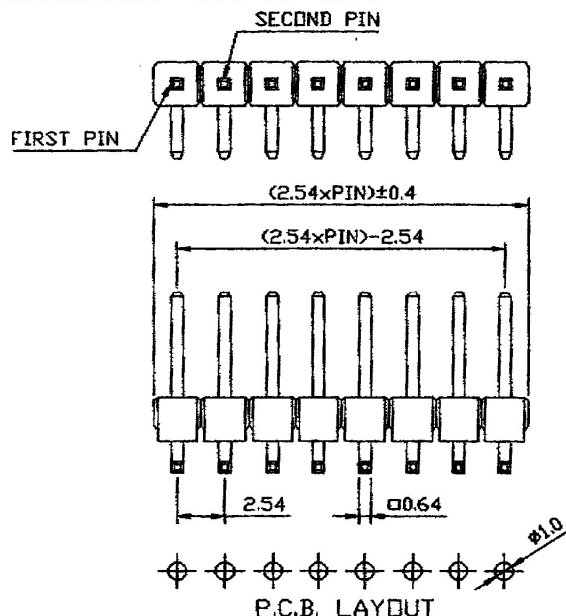

P.C.B. LAYOUT

TITLE	PIN HEADER PITCH=2.54mm Right Angle B-TYPE	SCALE		APP.	LISA	GENERAL TOLERANCE UNLESS SPECIFIED		REV
		SHEET	1 OF 1	CHK.	JACKY	LINEAR	0.0±0.30	
DWG.NO.	P3-011XXX140RABG	UNIT	MM	DR.	DAVID	ANGLES	0.00±0.20	
							±1°	