


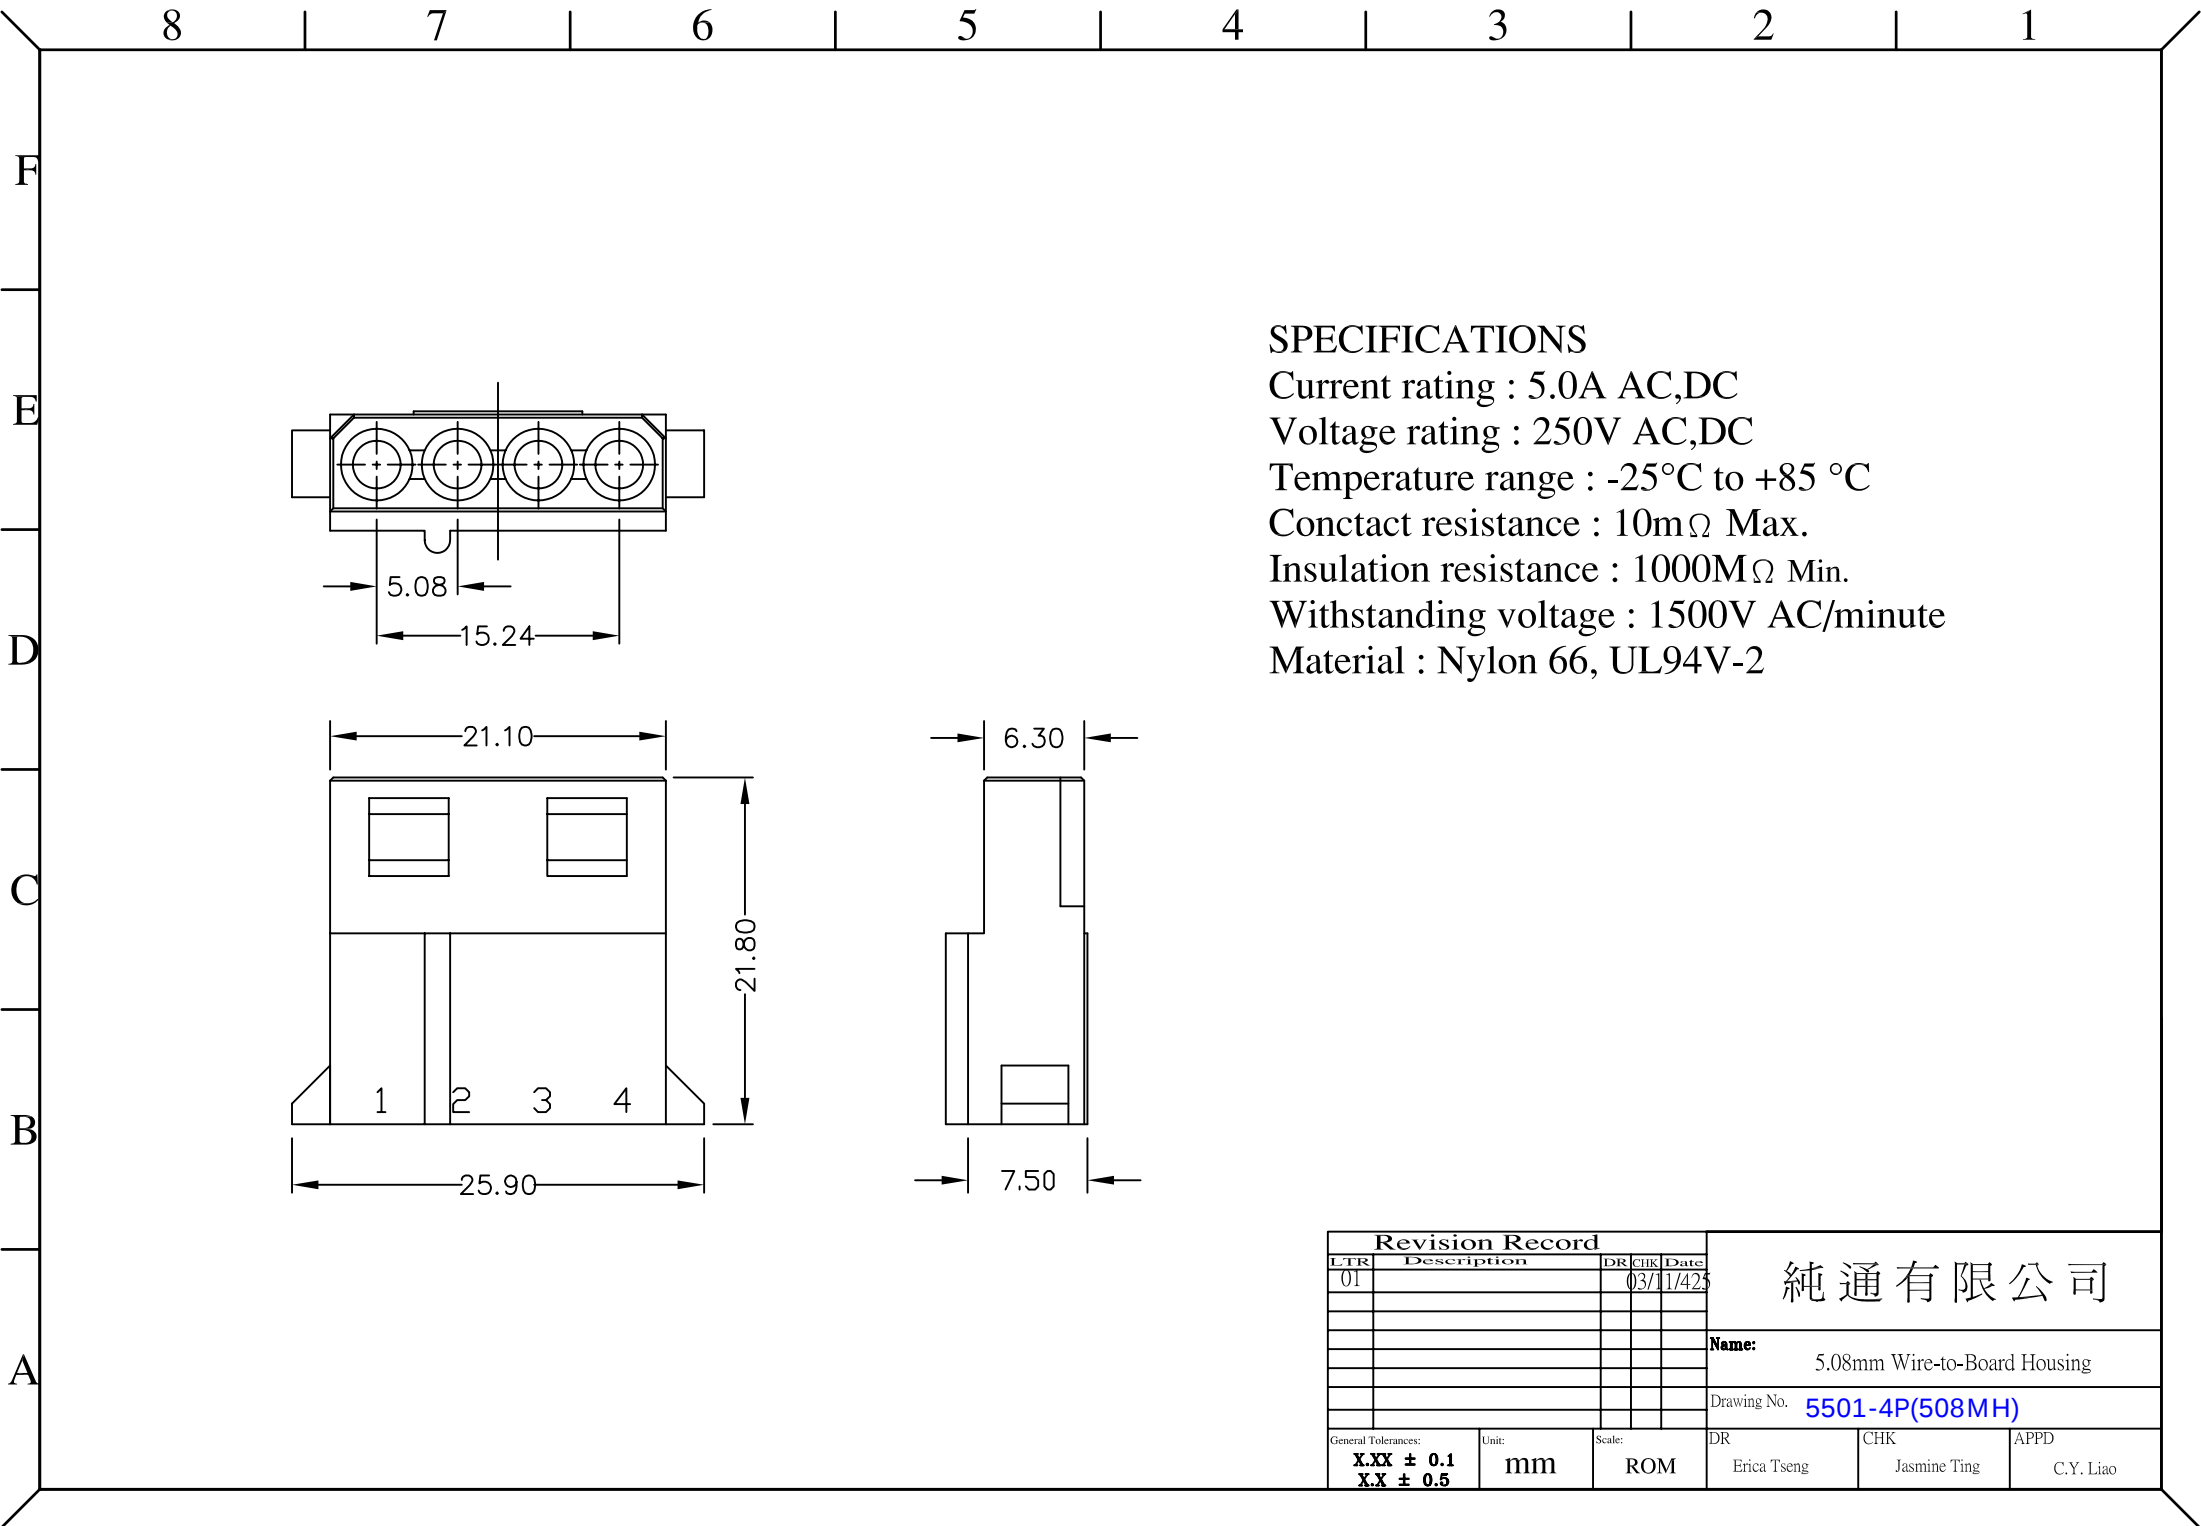

SPECIFICATIONS

Current rating : 5.0A AC,DC
Voltage rating : 250V AC,DC
Temperature range : -25°C to +85 °C
Conctact resistance : 10mΩ Max.
Insulation resistance : 1000MΩ Min.
Withstanding voltage : 1500V AC/minute
Material : Nylon 66, UL94V-2

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
01				03/11/425	Name: 5.08mm Wire-to-Board Housing		
					Drawing No. 5501-4P(508MH)		
General Tolerances:		Unit:	Scale:	DR	CHK	APPD	
X.XX ± 0.1		mm	ROM	Erica Tseng	Jasmine Ting	C.Y. Liao	
X.X ± 0.5							