

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 100M Ω / min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20MΩ / max.

Material

Material: PBT, UL94V-0

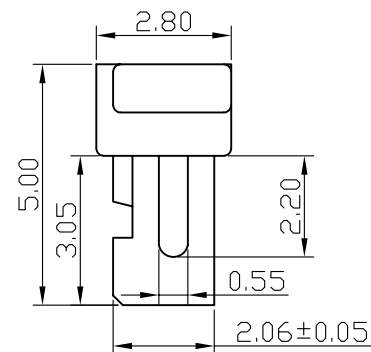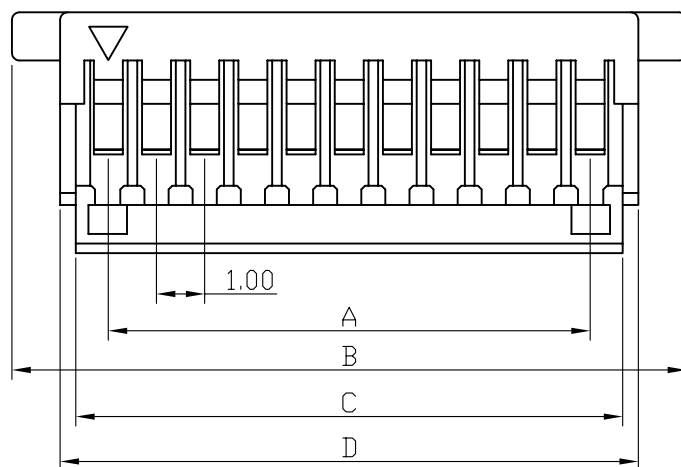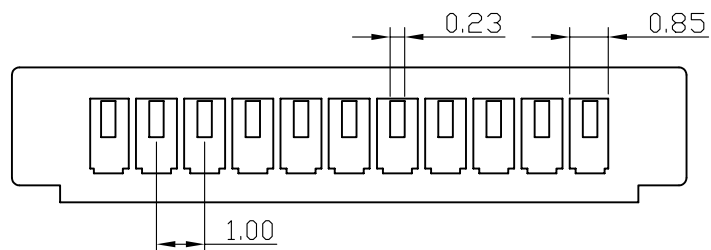

Poles	Dimension mm (in.)				Note
	A	B	C	D	
2	1.0	5.0	2.37	3.00	
3	2.0	6.0	3.37	4.00	
4	3.0	7.0	4.37	5.00	
5	4.0	8.0	5.37	6.00	
6	5.0	9.0	6.37	7.00	
7	6.0	10.0	7.37	8.00	
8	7.0	11.0	8.37	9.00	
9	8.0	12.0	9.37	10.00	
10	9.0	13.0	10.37	11.00	
11	10.0	14.0	11.37	12.00	
12	11.0	15.0	12.37	13.00	
13	12.0	16.0	13.37	14.00	
14	13.0	17.0	14.37	15.00	
15	14.0	18.0	15.37	16.00	
16	15.0	19.0	16.37	17.00	
17	16.0	20.0	17.37	18.00	
18	17.0	21.0	18.37	19.00	
19	18.0	22.0	19.37	20.00	
20	19.0	23.0	20.37	21.00	

B尺寸公差如下:

 $2P \sim 10P \pm 0.10\text{mm}$

11P~20P±0.20mm

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
					Name: 1.0mm Wire-to-Board Housing		
Drawing No.					5501-XP(100SH)		
General Tolerances: X.XX ± 0.1 XX + 0.25		Unit: mm	Scale: ROM	DR		CHK	APPD