


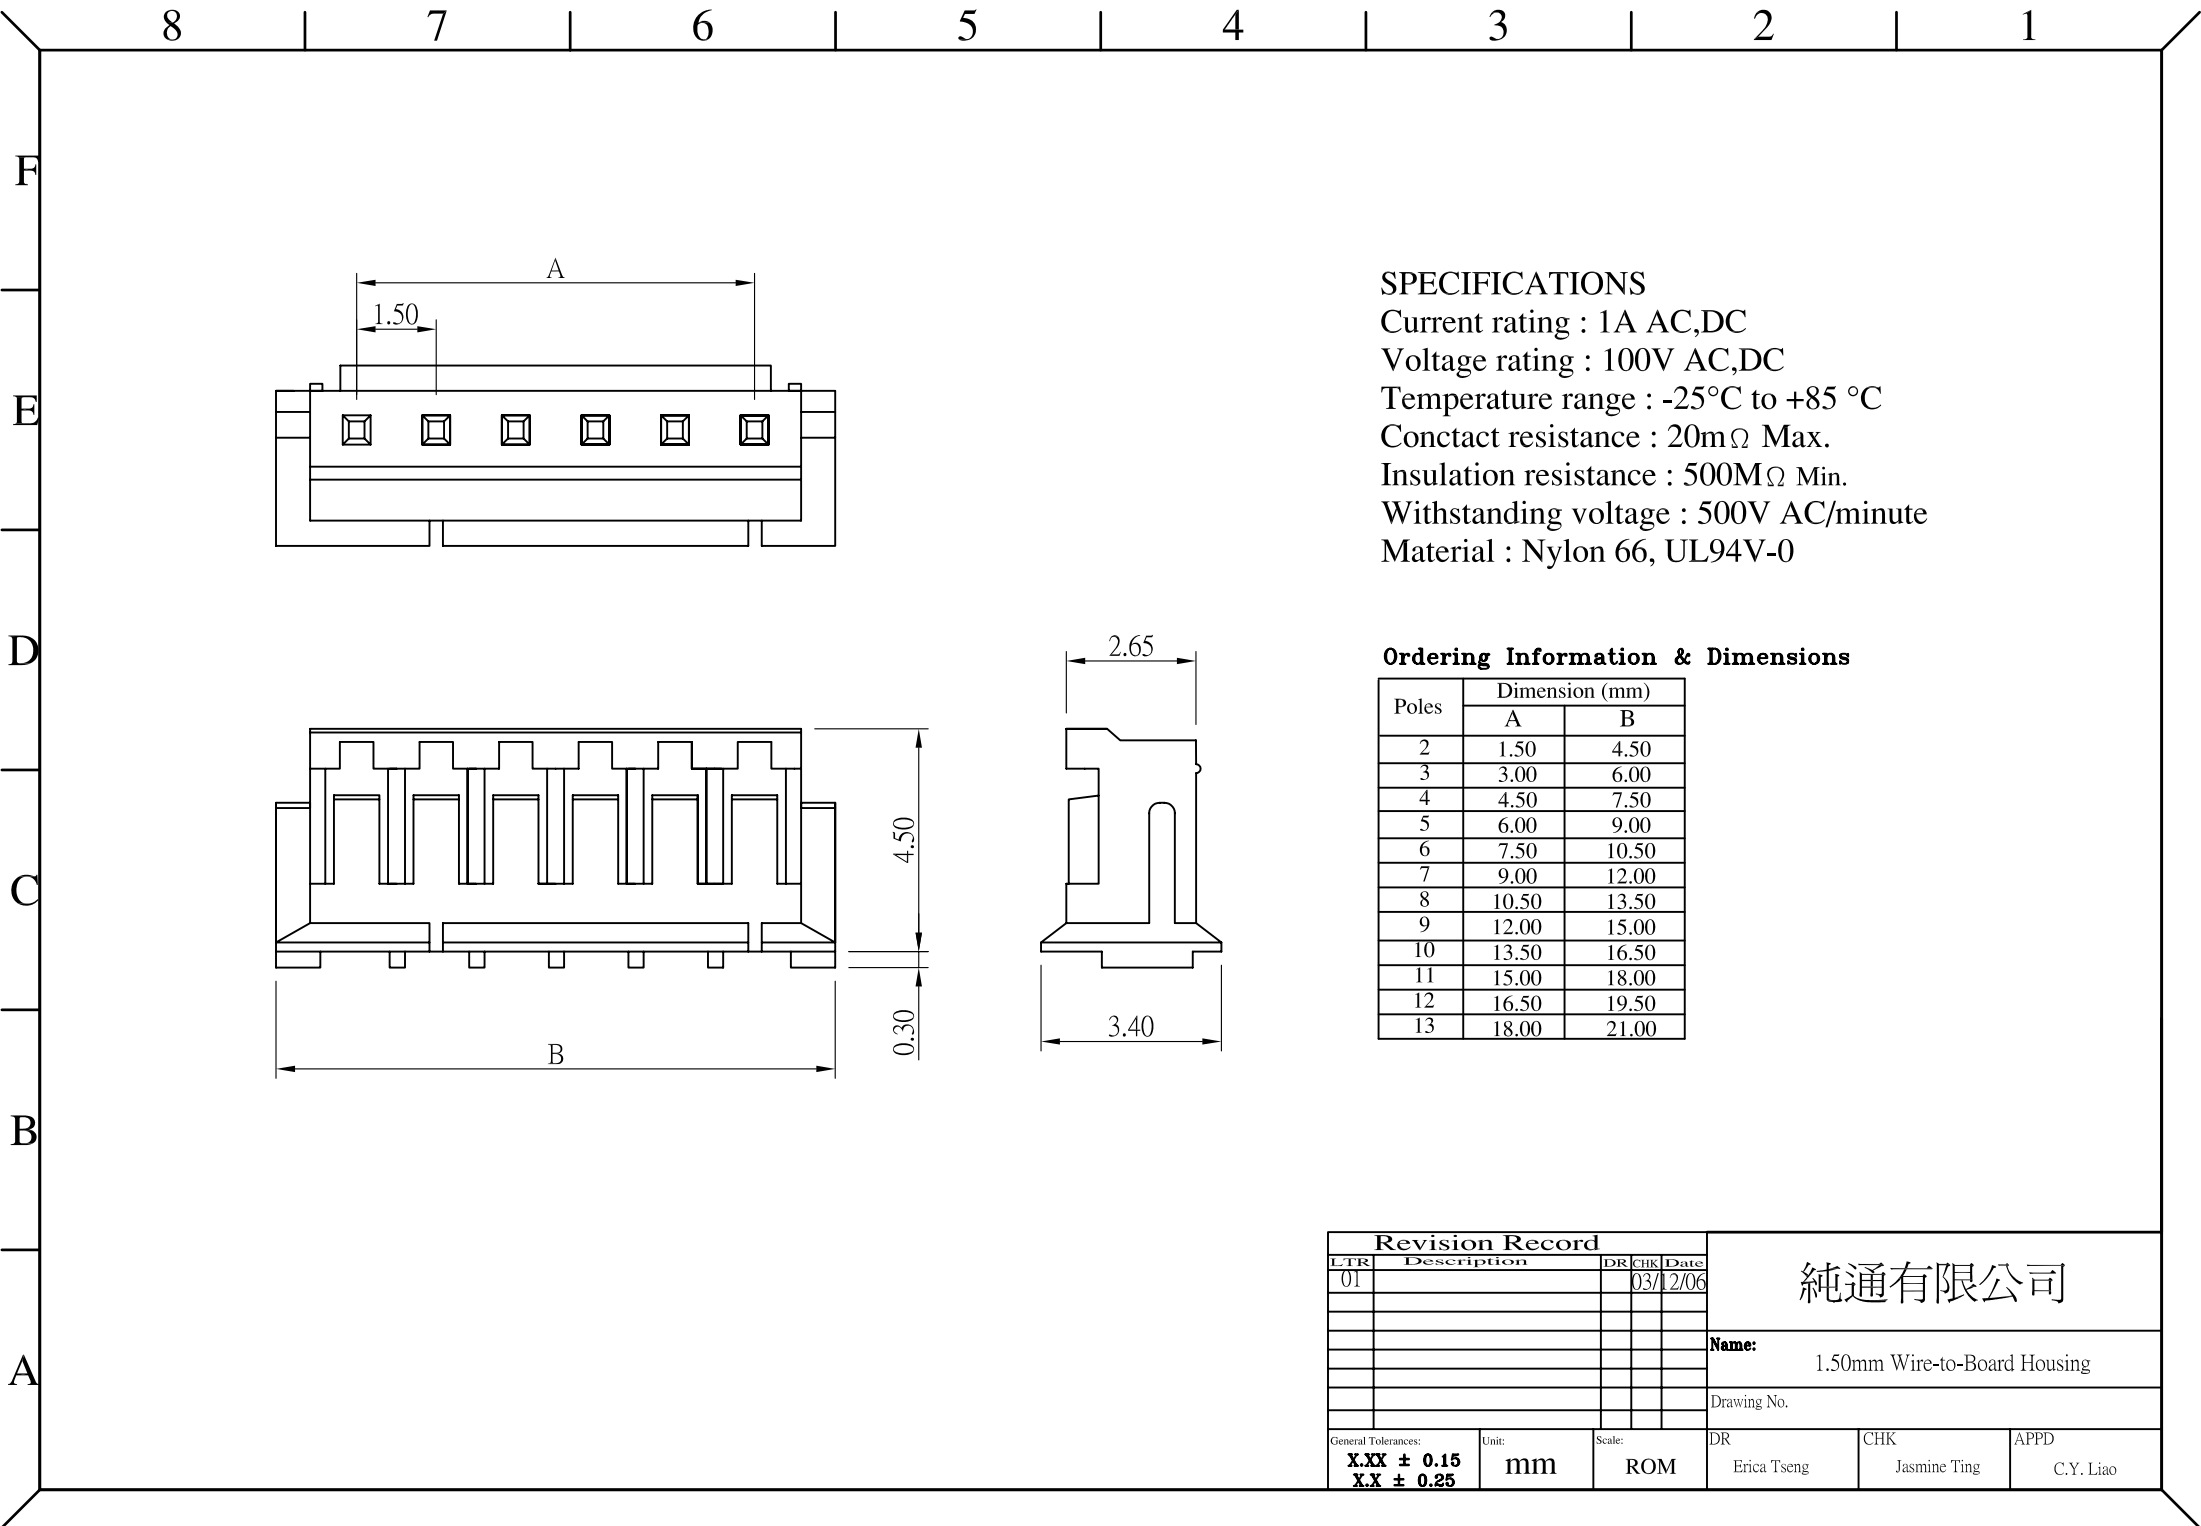

SPECIFICATIONS

Current rating : 1A AC,DC
Voltage rating : 100V AC,DC
Temperature range : -25°C to +85 °C
Conctact resistance : 20mΩ Max.
Insulation resistance : 500MΩ Min.
Withstanding voltage : 500V AC/minute
Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
01				03/12/06	Name: 1.50mm Wire-to-Board Housing		
					Drawing No.		
General Tolerances:		Unit:	Scale:	DR	CHK	APPD	
X.XX ± 0.15		mm	ROM	Erica Tseng	Jasmine Ting	C.Y. Liao	
X.X ± 0.25							