


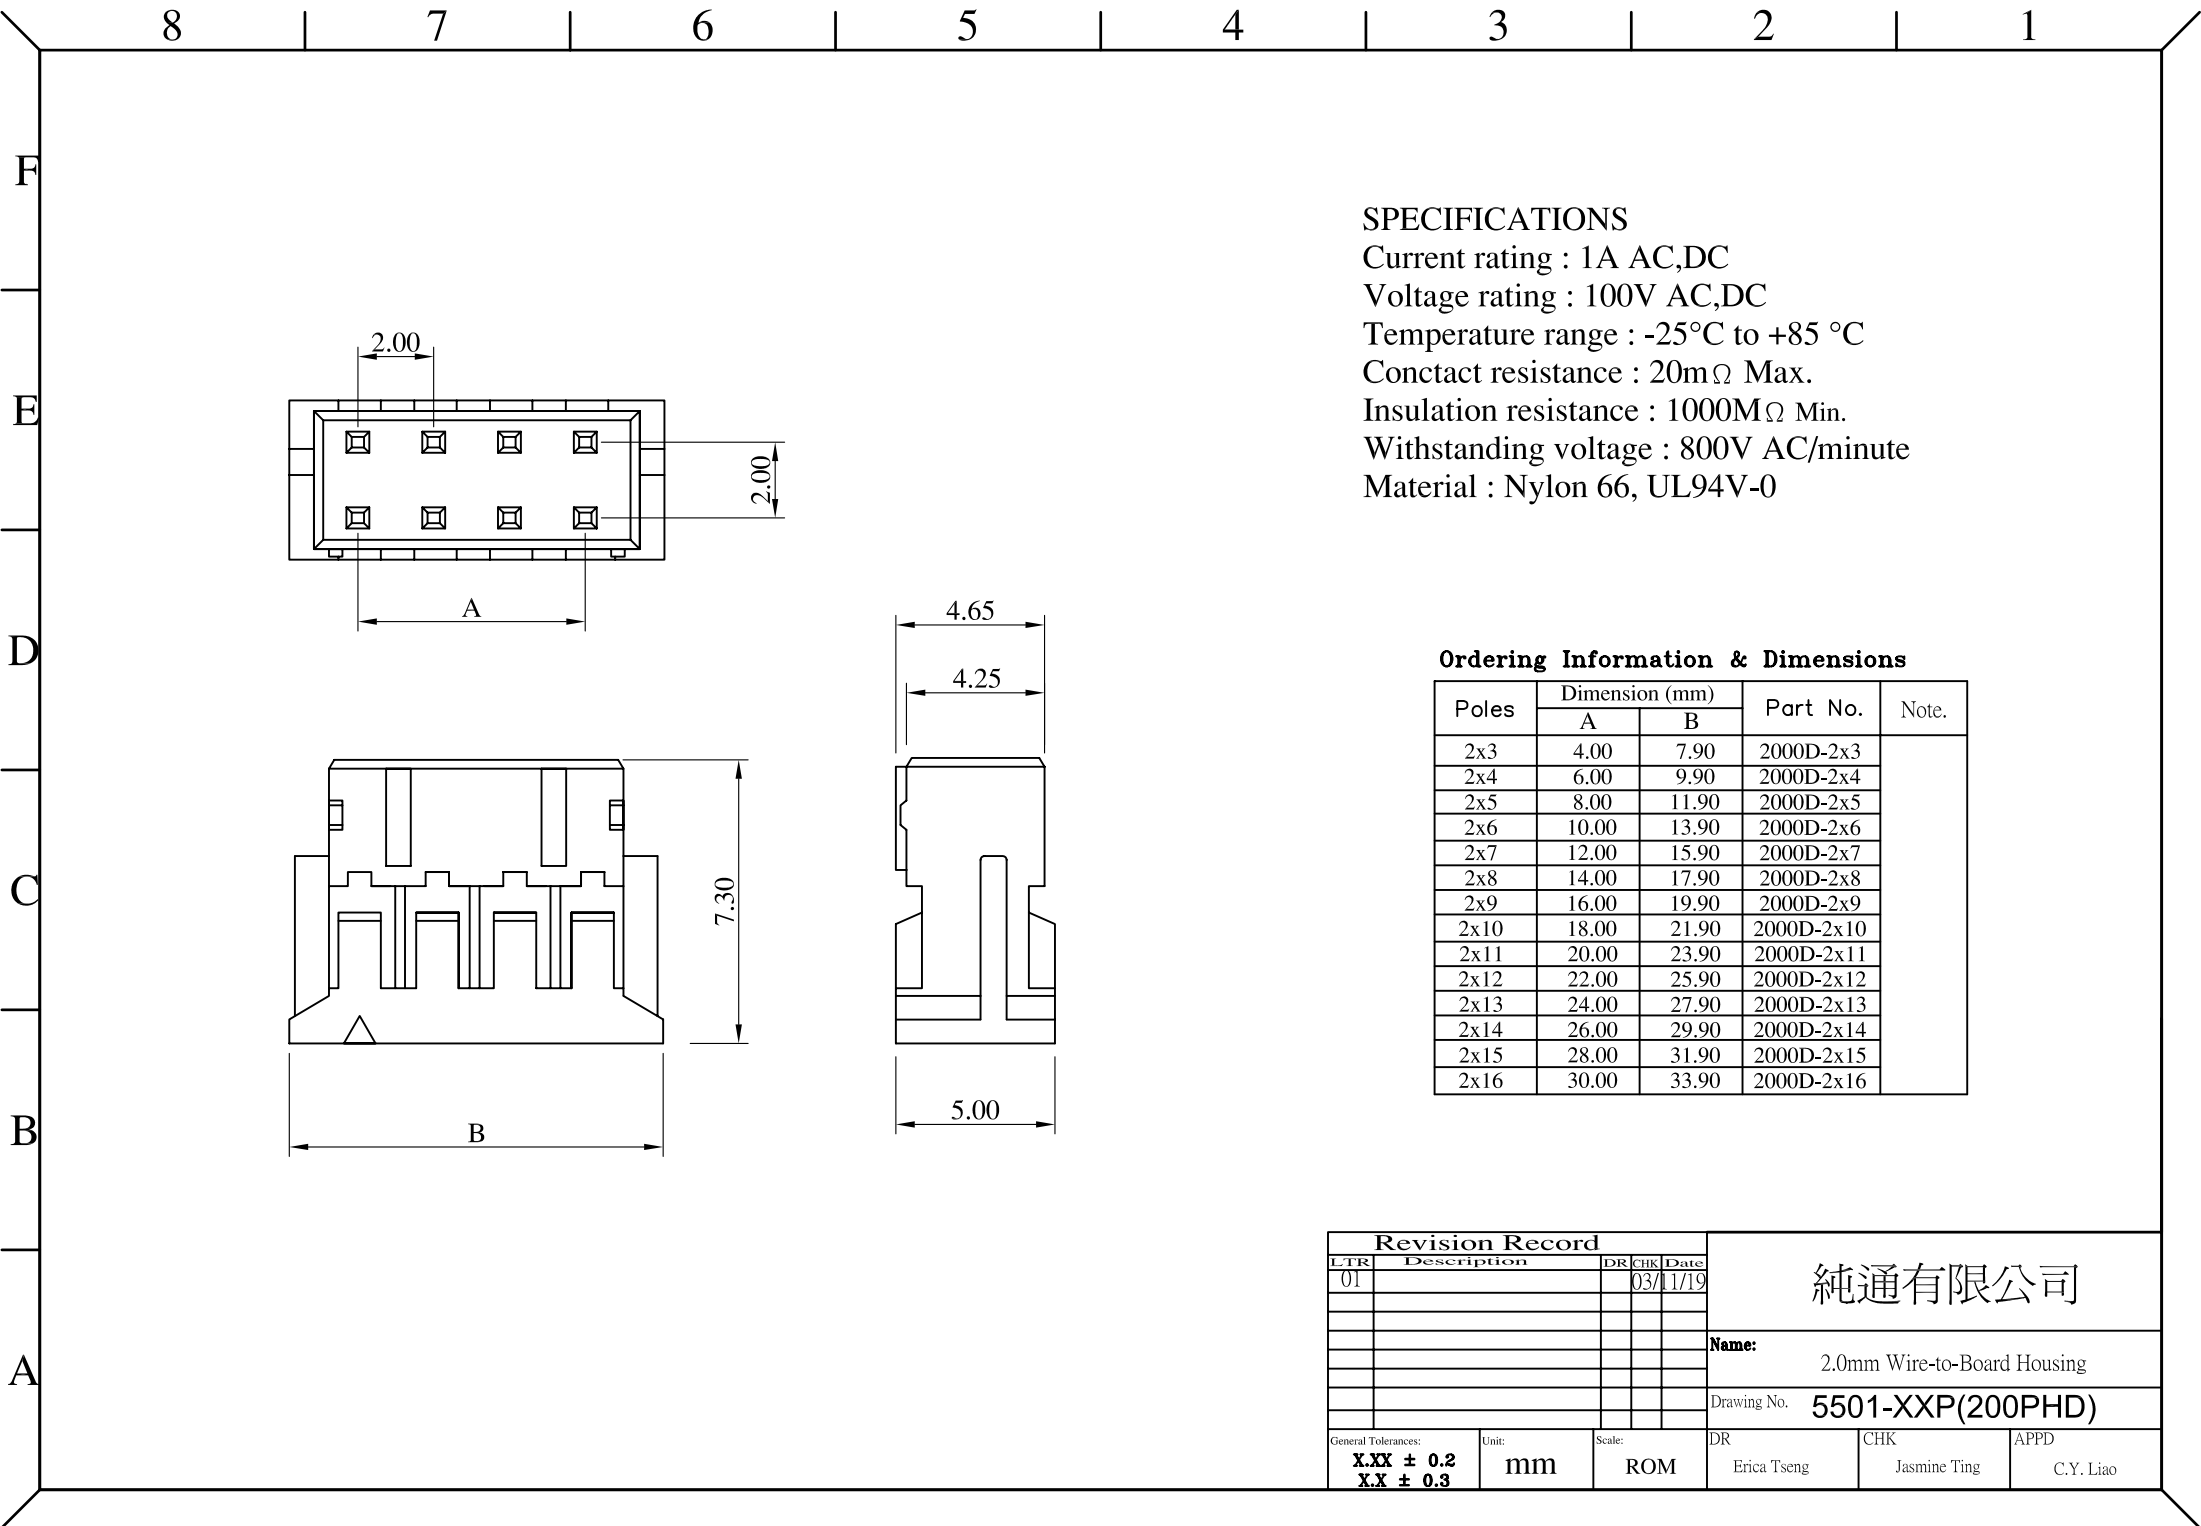

SPECIFICATIONS

Current rating : 1A AC,DC
Voltage rating : 100V AC,DC
Temperature range : -25°C to +85 °C
Conctact resistance : 20mΩ Max.
Insulation resistance : 1000MΩ Min.
Withstanding voltage : 800V AC/minute
Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2x3	4.00	7.90	2000D-2x3	
2x4	6.00	9.90	2000D-2x4	
2x5	8.00	11.90	2000D-2x5	
2x6	10.00	13.90	2000D-2x6	
2x7	12.00	15.90	2000D-2x7	
2x8	14.00	17.90	2000D-2x8	
2x9	16.00	19.90	2000D-2x9	
2x10	18.00	21.90	2000D-2x10	
2x11	20.00	23.90	2000D-2x11	
2x12	22.00	25.90	2000D-2x12	
2x13	24.00	27.90	2000D-2x13	
2x14	26.00	29.90	2000D-2x14	
2x15	28.00	31.90	2000D-2x15	
2x16	30.00	33.90	2000D-2x16	

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
01				03/11/19			
General Tolerances:		Unit:	Scale:	DR	CHK	APPD	
X.XX ± 0.2		mm	ROM	Erica Tseng	Jasmine Ting	C.Y. Liao	
X.X ± 0.3							

Name: 2.0mm Wire-to-Board Housing
Drawing No. 5501-XXP(200PHD)