
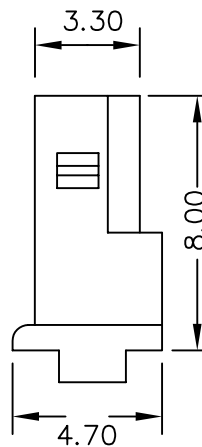
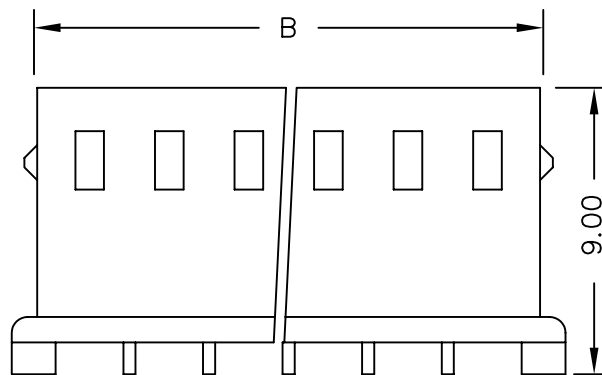


F
E
D
C
B
A

8 7 6 5 4 3 2 1

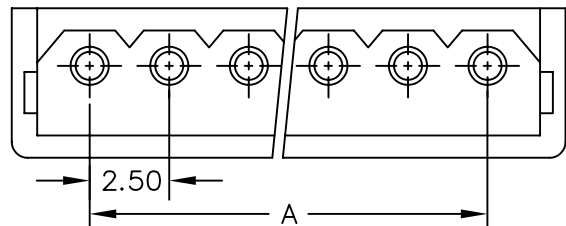

SPECIFICATIONS

Current rating : 3A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Conctact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2	2.50	5.80	2500M-02	
3	5.00	8.30	2500M-03	
4	7.50	10.80	2500M-04	
5	10.00	13.30	2500M-05	
6	12.50	15.80	2500M-06	
7	15.00	18.30	2500M-07	
8	17.50	20.80	2500M-08	
9	20.00	23.30	2500M-09	
10	22.50	25.80	2500M-10	
11	25.00	28.30	2500M-11	
12	27.50	30.80	2500M-12	
13	30.00	33.30	2500M-13	
14	32.50	35.80	2500M-14	
15	35.00	38.30	2500M-15	

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
01				03/11/425	Name: 2.5mm Wire-to-Board Housing		
					Drawing No.		
General Tolerances:		Unit:	Scale:	DR	CHK	APPD	
XX ± 0.2		mm	ROM	Erica Tseng	Jasmine Ting	C.Y. Liao	
X.X ± 0.35							