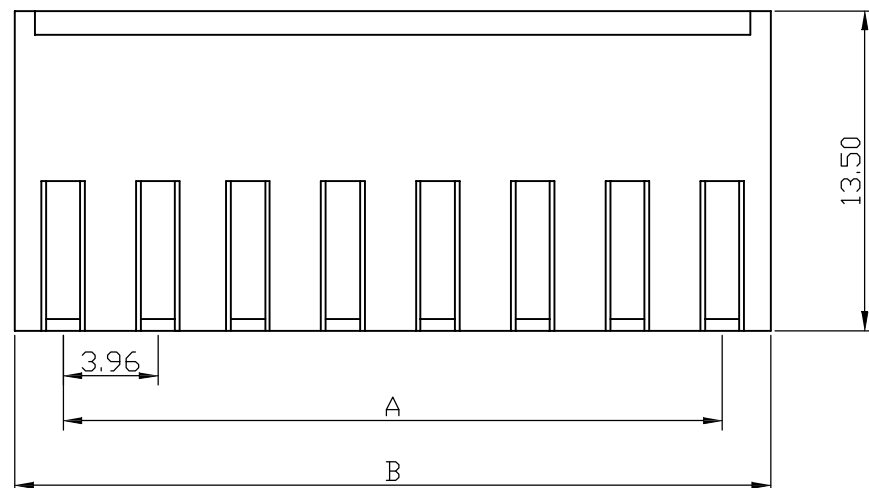
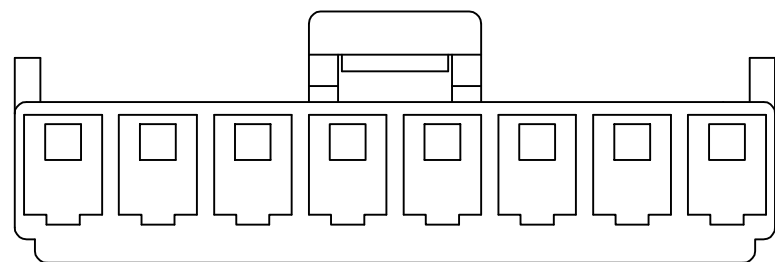


Specifications

Current Rating: 5A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	8.04 (0.317)
3	7.92 (0.312)	12.10 (0.476)
4	11.88 (0.468)	15.96 (0.628)
5	15.84 (0.624)	20.00 (0.787)
6	19.80 (0.780)	23.90 (0.941)
7	23.76 (0.935)	27.90 (1.098)
8	27.72 (1.074)	31.86 (1.254)
9	31.68 (1.247)	35.88 (1.413)
10	35.64 (1.403)	39.84 (1.569)
11	39.60 (1.559)	43.74 (1.722)
12	43.56 (1.715)	47.74 (1.880)
13	47.52 (1.871)	51.70 (2.035)
14	51.48 (2.027)	55.66 (2.191)



純通有限公司
Mindwaves Co.,Ltd

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

Wire to Board
Housing 3.96VH

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

Y.J.Lin

2010.7.28

± 0.3

5501-__P(396VH)-GP

A