
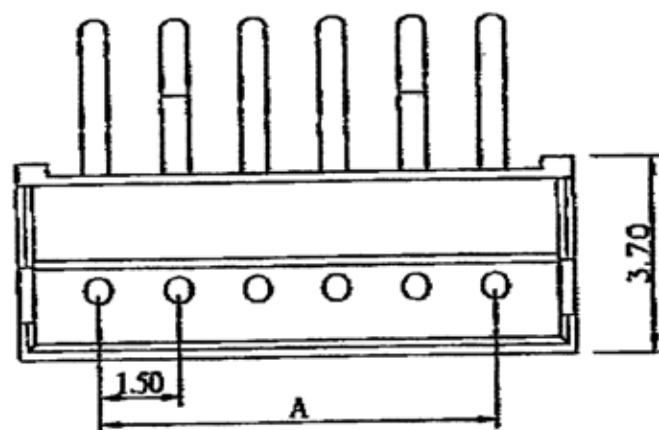


P.C.B LAYOUT

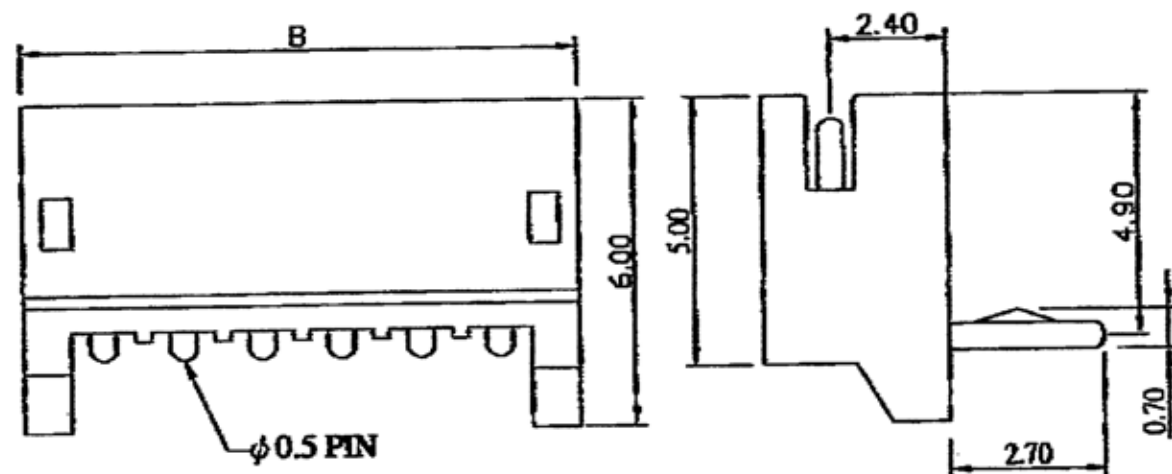

SPECIFICATIONS

Current rating : 1A AC,DC

Voltage rating : 100V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 20m Ω Max.

Insulation resistance : 500M Ω Min.

Withstanding voltage : 500V AC/minute

Material : Pin-Brass/Tin-plated

Base-Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)	
	A	B
2	1.5	4.5
3	3.0	6.0
4	4.5	7.5
5	6.0	9.0
6	7.5	10.5
7	9.0	12.0
8	10.5	13.5
9	12.0	15.0
10	13.5	16.5
11	15.0	18.0
12	16.5	19.5
13	18.0	21.0

Revision Record								
Rev.	Description	Date	By	Checked	Approved	純通有限公司 ZH150mm Wire-to-Board Header Drawing No. 5500-XXR(150ZH)		
01								
Desig. / Revision		Qty	Unit	Mat.	Part	CER	APPR	
XX * 0.2 YY * 0.20		MM	ROM		Eric Tang	Jessie Tng	C.Y. Liao	