


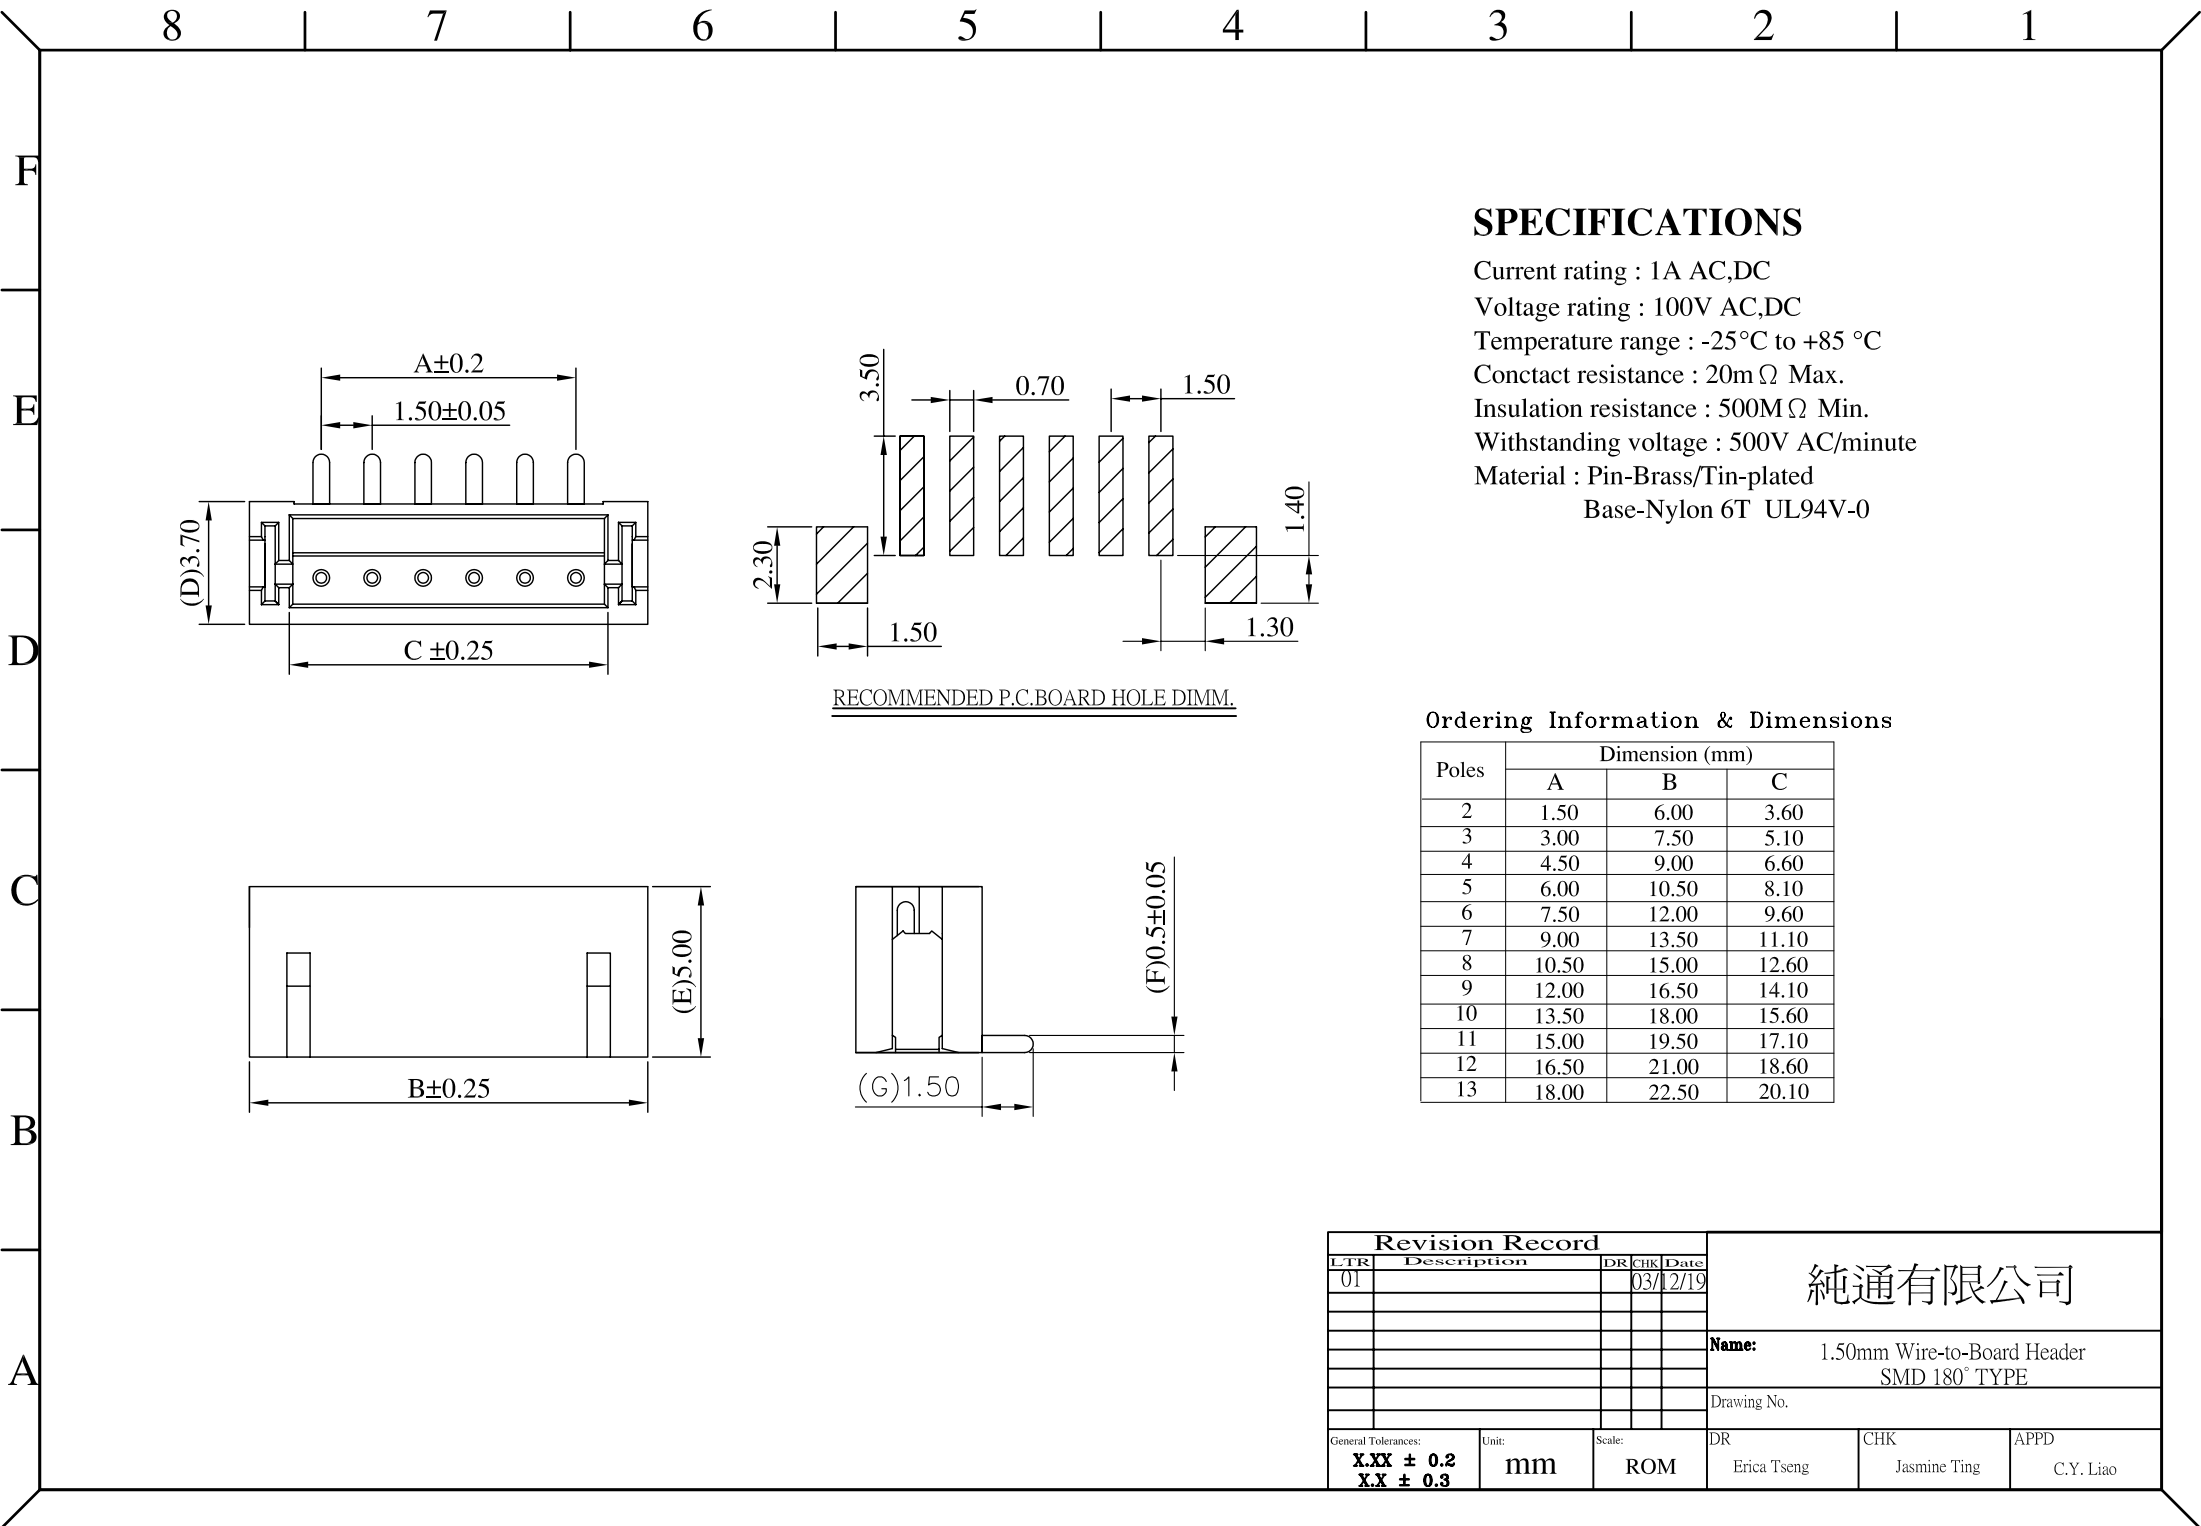

SPECIFICATIONS

Current rating : 1A AC,DC
Voltage rating : 100V AC,DC
Temperature range : -25℃ to +85 ℃
Conctact resistance : 20m Ω Max.
Insulation resistance : 500M Ω Min.
Withstanding voltage : 500V AC/minute
Material : Pin-Brass/Tin-plated
Base-Nylon 6T UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10

Revision Record					純通有限公司		
LTR	Description	DR	CHK	Date			
01				03/12/19	Name: 1.50mm Wire-to-Board Header SMD 180° TYPE		
					Drawing No.		
General Tolerances:		Unit:	Scale:	DR	CHK	APPD	
X.XX ± 0.2		mm	ROM	Erica Tseng	Jasmine Ting	C.Y. Liao	
X.X ± 0.3							