
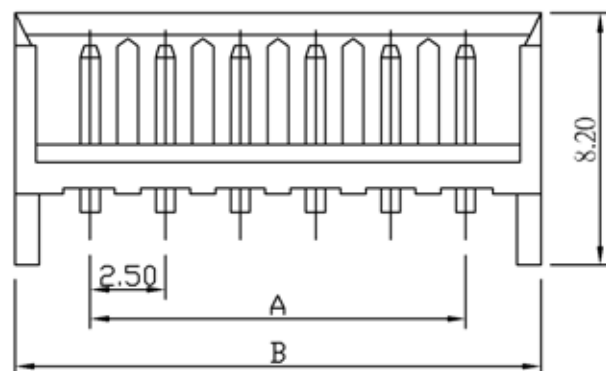
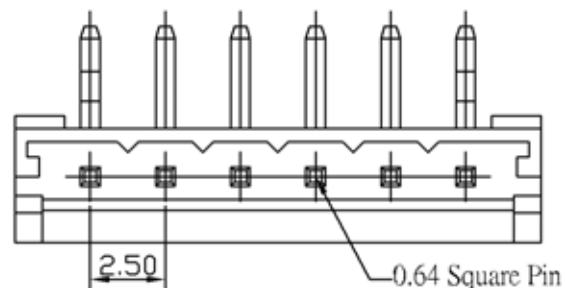


RECOMMENDED P.C.BOARD HOLE DIMM.

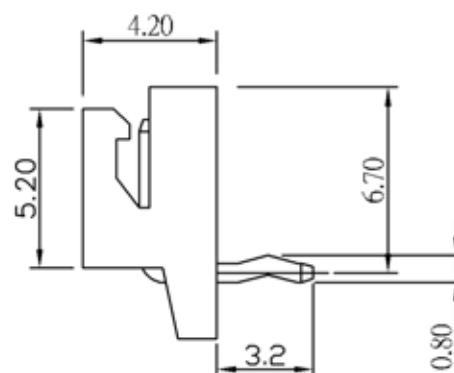

SPECIFICATIONS

Electrical

Current Rating: 2.5A AC, DC

Voltage Rating: 250V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω /min.

Dielectric Withstanding Voltage: 800V AC/ min.

Contact Resistance: 10mΩ / max.

Material

Terminal Material: Brass, Copper-Undercoated/
Tin-Lead plated

Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)		Part No.	Note
	A	B		
2	2.50 (0.098)	7.50 (0.295)	2501H-02-RT	
3	5.00 (0.197)	10.00 (0.394)	2501H-03-RT	
4	7.50 (0.295)	12.50 (0.492)	2501H-04-RT	
5	10.00 (0.394)	15.00 (0.591)	2501H-05-RT	
6	12.50 (0.492)	17.50 (0.689)	2501H-06-RT	
7	15.00 (0.591)	20.00 (0.787)	2501H-07-RT	
8	17.50 (0.689)	22.50 (0.886)	2501H-08-RT	
9	20.00 (0.787)	25.00 (0.984)	2501H-09-RT	
10	22.50 (0.886)	27.50 (1.082)	2501H-10-RT	
11	25.00 (0.984)	30.00 (1.181)	2501H-11-RT	
12	27.50 (1.082)	32.50 (1.280)	2501H-12-RT	
13	30.00 (1.181)	35.00 (1.378)	2501H-13-RT	
14	32.50 (1.280)	37.50 (1.476)	2501H-14-RT	
15	35.00 (1.378)	40.00 (1.575)	2501H-15-RT	

Revision Record					
I.T.R.	Description	DTR	COR.	Date	
01				03/12/20	
General Tolerance:		Unit:		Scale:	
X.XX ± 0.2		mm		ROM	
XX ± 0.3					

純通有限公司

Name:	2.5mm Wire-to-Board Header DIP 90° Type
--------------	--

Drawing No.

DR	CHK	APPD
Erica Tseng	Jasmine Ting	C.Y. Liao