
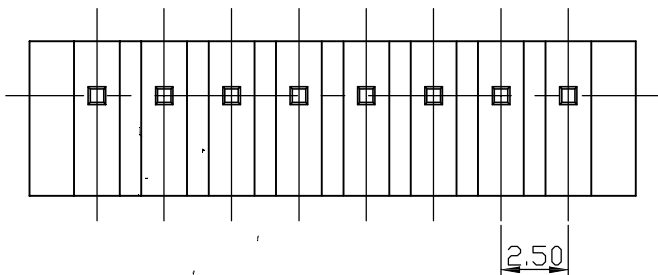
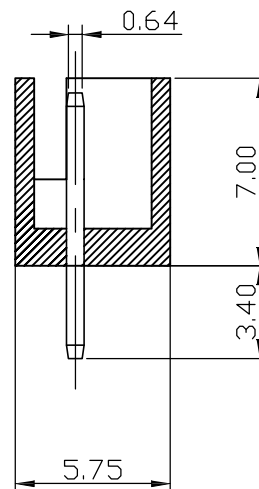


RECOMMENDED P.C. BOARD HOLE DIM.

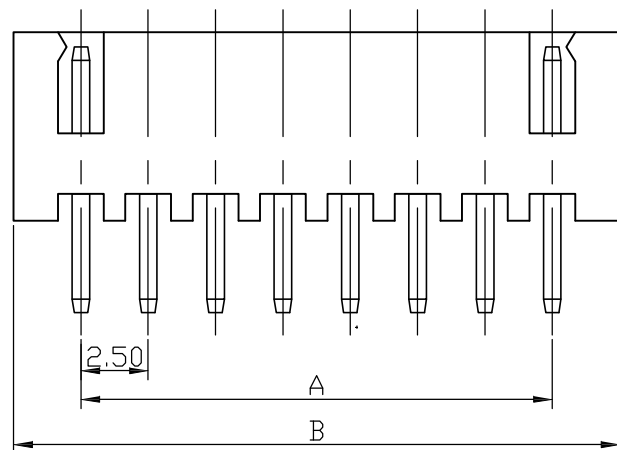

Specifications

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC Maximum
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding voltage: 1000V AC/minute
 Terminal Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	2.50 (0.098)	7.50 (0.295)
3	5.00 (0.197)	10.00 (0.394)
4	7.50 (0.295)	12.50 (0.492)
5	10.00 (0.394)	15.00 (0.591)
6	12.50 (0.492)	17.50 (0.689)
7	15.00 (0.591)	20.00 (0.787)
8	17.50 (0.689)	22.50 (0.886)
9	20.00 (0.787)	25.00 (0.984)
10	22.50 (0.886)	27.50 (1.082)
11	25.00 (0.984)	30.00 (1.181)
12	27.50 (1.082)	32.50 (1.280)
13	30.00 (1.181)	35.00 (1.378)
14	32.50 (1.280)	37.50 (1.476)
15	35.00 (1.378)	40.00 (1.575)
16	37.50 (1.476)	42.50 (1.673)
17	40.00 (1.575)	45.00 (1.772)
18	42.50 (1.673)	47.50 (1.870)
19	45.00 (1.772)	50.00 (1.969)
20	47.50 (1.870)	52.50 (2.067)



純通有限公司
Mindwaves Co., Ltd

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

Wire to Board
 Wafer 2.5XH 180D

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

Y.J.Lin

±0.3

5500-__P(250XH)-GP

A