

FEATURES AND SPECIFICATIONS

Features and Benefits



Size 2 to 20 circuits

Electrical

Current Rating: 3A AC, DC
Voltage Rating: 250V AC/ max.
Insulation Resistance: 1000M Ω / min.
Dielectric Withstanding Voltage: 1500V AC/ min.
Contact Resistance: 10m Ω / max.
Operating Temp.: -25°C ~ +85°C


Physical

Material: Nylon 66, UL94V-2
Terminal Material: Brass/ Tin-plated/ Gold-plated

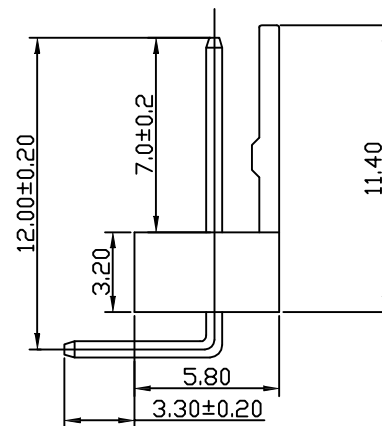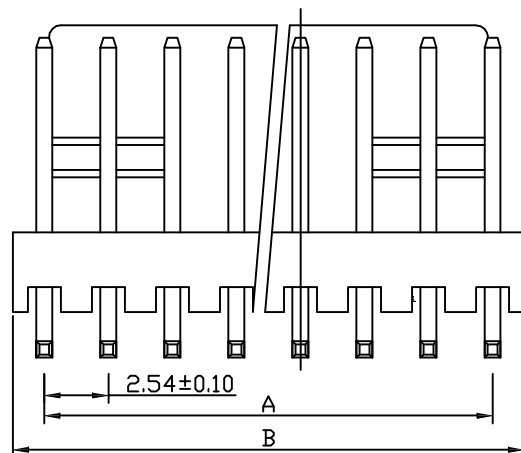

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.12(0.202)
3	5.08(0.200)	7.66(0.302)
4	7.62(0.300)	10.20(0.402)
5	10.16(0.400)	12.74(0.502)
6	12.70(0.500)	15.30(0.602)
7	15.24(0.600)	17.94(0.706)
8	17.78(0.700)	20.48(0.806)
9	20.32(0.800)	23.02(0.906)
10	22.86(0.900)	25.58(1.007)
11	25.40(1.000)	28.12(1.107)
12	27.94(1.100)	30.68(1.208)
13	30.48(1.200)	33.10(1.303)
14	33.02(1.300)	35.80(1.409)
15	35.56(1.400)	38.34(1.509)
16	38.10(1.500)	40.94(1.612)
17	40.64(1.600)	43.30(1.705)
18	43.18(1.700)	45.90(1.807)
20	48.26(1.900)	50.80(2.000)

註：
2P~9P公差值為±0.20
10P~20P公差值為±0.30

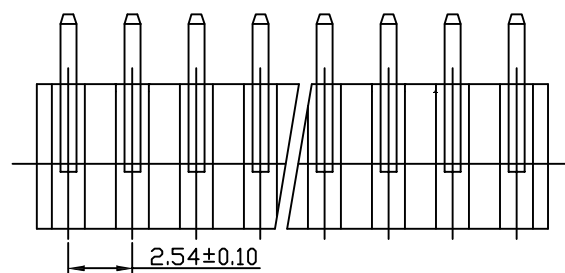

純通有限公司
Mindwaves Co.,Ltd

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

Wire to Board
Wafer 2.54AM Reverse

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

2010.7.27

±0.3

5500-__RS(254AM)-GP

A

Y.J.Lin