
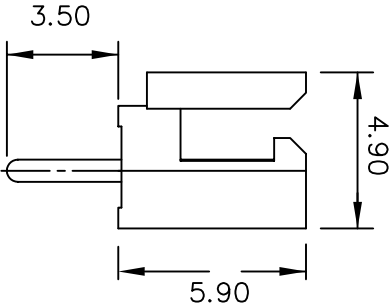


PCB LAYOUT COMPONENT SIDE

Current Rating:3A AC, DC
Voltage Rating: 250 AC Maximum
Operating Temp: -25°C ~ + 85°C
Contact Resistance: 20MΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/ Tin-plated/ Gold-plated
Material: Nylon 66, UL94V-0

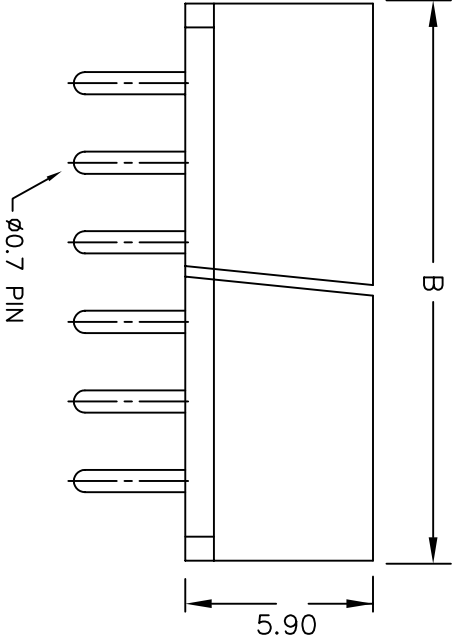

Poles	Dimension mm (in.)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.50	40.00

Revision Record			純通有限公司		
TR	Description	DATE			
01	修改公差值	02/10/19			
02	修改圖面配置	03/03/18			
			Name: 2.5mm Wire-to-Board Header		
			DIP 180° Type		
			Drawing No. 5500-XXP(2501M)		
General Tolerances:			Unit: mm		
XX.X ± 0.2			Scale: ROM		
XX ± 0.35			DR: Erica Tseng		
			CHK: Jasmine Ting		
			APPD: C.Y. Liao		