
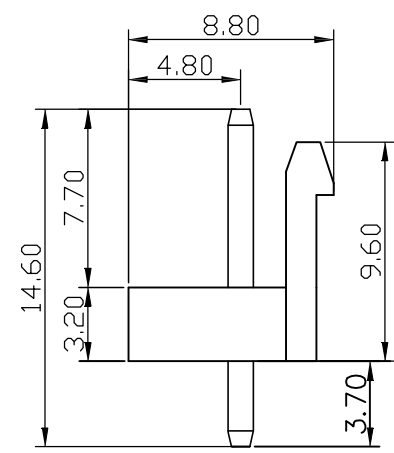
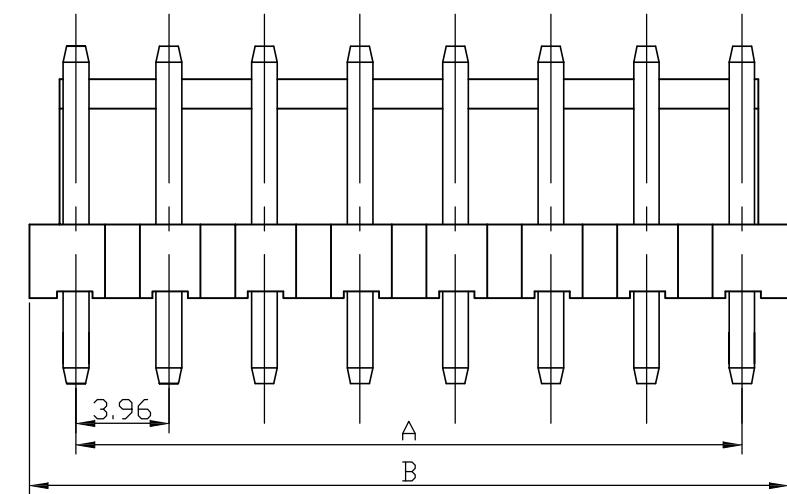


RECOMMENDED P.C.BOARD HOLE DIMM.

Specifications

Current Rating: 5A AC, DC
 Voltage Rating: 250V AC Maximum
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Terminal Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	7.92 (0.312)
3	7.92 (0.312)	11.92 (0.469)
4	11.88 (0.468)	15.84 (0.624)
5	15.84 (0.624)	19.84 (0.781)
6	19.80 (0.780)	23.80 (0.937)
7	23.76 (0.935)	27.88 (1.098)
8	27.72 (1.074)	31.74 (1.250)
9	31.68 (1.247)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)
13	47.52 (1.871)	51.72 (2.036)
14	51.48 (2.027)	55.92 (2.202)

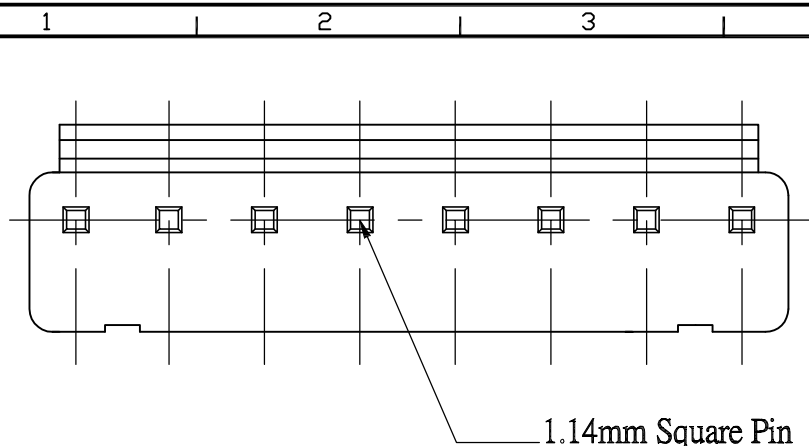

純通有限公司
Mindwaves Co.,Ltd

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

mm

Wire to Board
 Wafer 3.96VH 180D

2010.7.27

±0.3

5500-__P(396VH)-GP

A

Y.J.Lin