

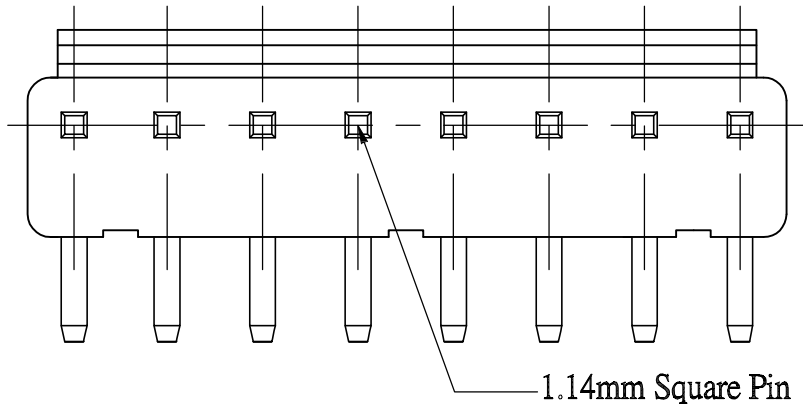


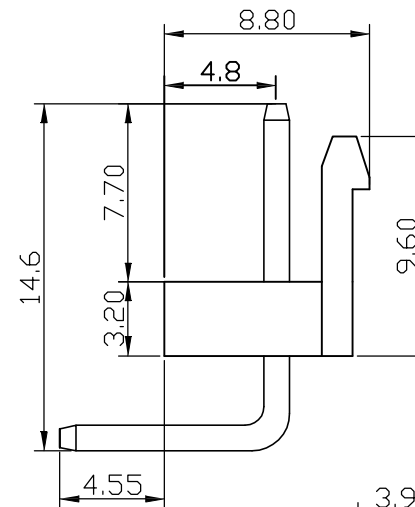


### Specifications

Current Rating: 5A AC, DC  
 Voltage Rating: 250V AC Maximum  
 Operating Temp: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000mΩ Min  
 Dielectric Withstanding Voltage: 1500V AC,DC Min  
 Terminal Material: Brass/Tin-plated  
 Plating: Tin or Gold plated  
 Material: Nylon 66, UL94V-0  
 Color: White or Natural

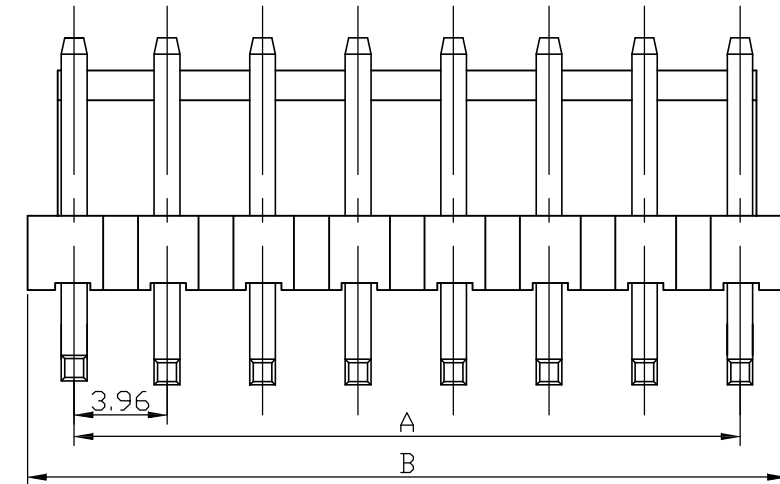

| Poles | Dimension mm (in.) |               |
|-------|--------------------|---------------|
|       | A                  | B             |
| 2     | 3.96 (0.156)       | 7.92 (0.312)  |
| 3     | 7.92 (0.312)       | 11.92 (0.469) |
| 4     | 11.88 (0.468)      | 15.84 (0.624) |
| 5     | 15.84 (0.624)      | 19.84 (0.781) |
| 6     | 19.80 (0.780)      | 23.80 (0.937) |
| 7     | 23.76 (0.935)      | 27.88 (1.098) |
| 8     | 27.72 (1.074)      | 31.74 (1.250) |
| 9     | 31.68 (1.247)      | 35.86 (1.412) |
| 10    | 35.64 (1.403)      | 39.90 (1.571) |
| 11    | 39.60 (1.559)      | 43.84 (1.726) |
| 12    | 43.56 (1.715)      | 47.92 (1.887) |
| 13    | 47.52 (1.871)      | 51.72 (2.036) |
| 14    | 51.48 (2.027)      | 55.92 (2.202) |

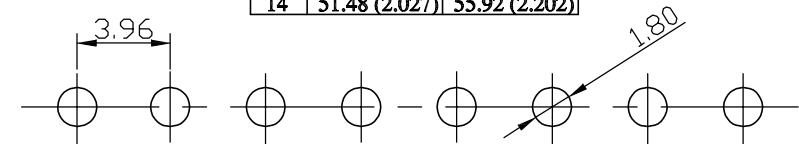

### RECOMMENDED P.C.BOARD HOLE DIMM.



純通有限公司  
**Mindwaves Co.,Ltd**

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

Wire to Board  
 Wafer 3.96VH 90D

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

2010.7.27

±0.3

5500-\_\_R(396VH)-GP

A

Y.J.Lin