

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.



Contact Resistance: 10m Ω / max.

Material

Material: Nylon66, UL94V-2

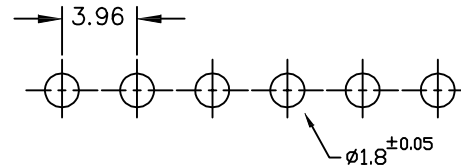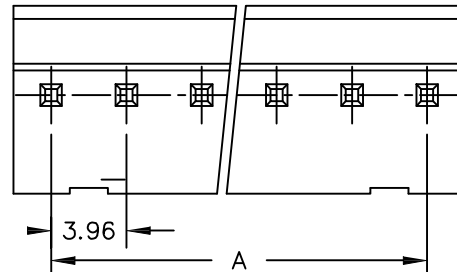

RECOMMENDED P.C. BOARD HOLE DIMM.

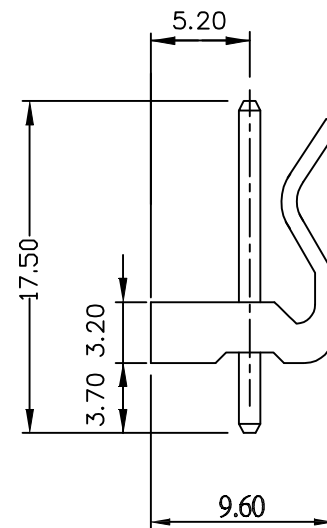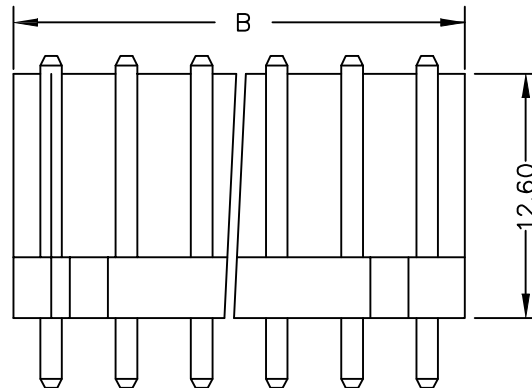

Poles	Dimension mm (in.)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20



純通有限公司
Mindwaves Co.,Ltd

COMPUTER NO.

UNIT

SCALE

PART NAME

Wire to Board
Wafer 3.96WH 180D

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

MODEL

PAGE 1 OF 1

Y.J.Lin

2010.7.27

± 0.3

5500-__P(396WH)-GP

A