


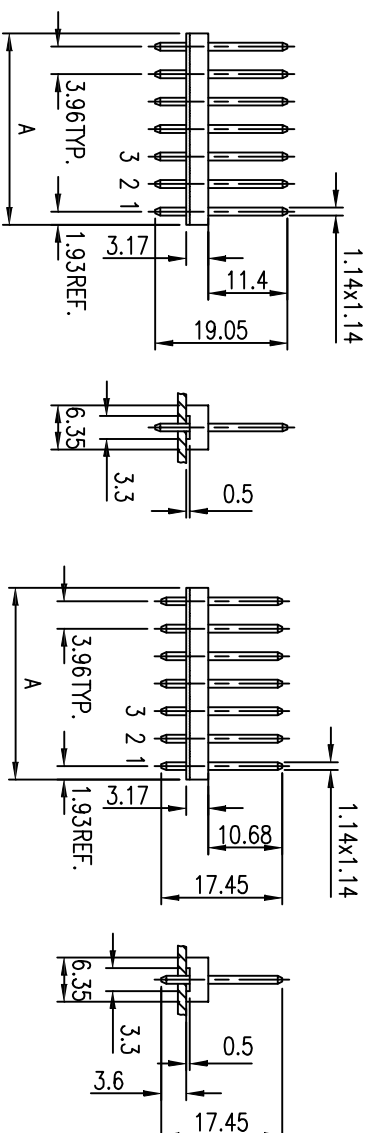

TYPE 1


TYPE 2

FEATURES
Available in 02-24 circuits

MATERIAL
Contact material: Brass
Insulator Material: nylon66, UL94V-2 Or UL94V-0

FINISH
Contact :Tin plated, plating options available

SPECIFICATIONS
Current Rating: 7A
Insulation resistance: 1000 M Ω min
Dielectric withstanding: 250 VAC/DC
Operating Temperature: -40°C to 105°C

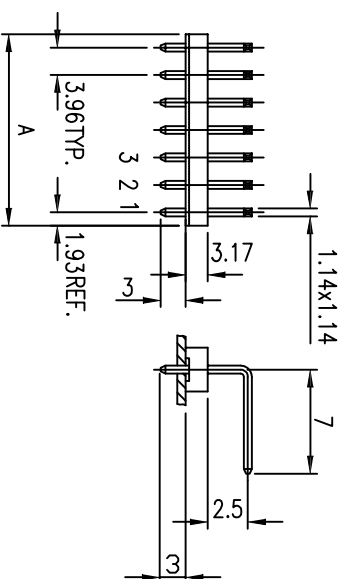

TYPE 3

Dimensional Information-(mm)

Circuits	Dim.A
02	7.93
03	11.87
04	15.85
05	19.80
06	23.77
07	27.72
08	31.75
09	35.70
10	39.75
11	43.66
12	47.64

Circuits	Dim.A
13	51.83
14	55.34
15	59.30
16	63.26
17	67.22
18	71.18
19	75.14
20	79.10
21	83.06
22	87.02
23	90.98
24	94.94



純通有限公司
Mindwaves Co., Ltd

COMPUTER NO.

UNIT

SCALE

PART NAME

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

MODEL

PAGE 1 OF 1

2010.3.10

0. ± 0.50
0.0 ± 0.30
0.00 ± 0.20

5500-XXP (3962WH)
5500-XXR (3962WH)

A

Wafer 3.96mm 無靠背 系列